


Data Sheet for Article: IL198328-B

Metering insert 3-28E compl. 3 cou. pl. front pl. st. STMK

Front Plates - Sheet Steel, Meter Panel according to OVE E 8640

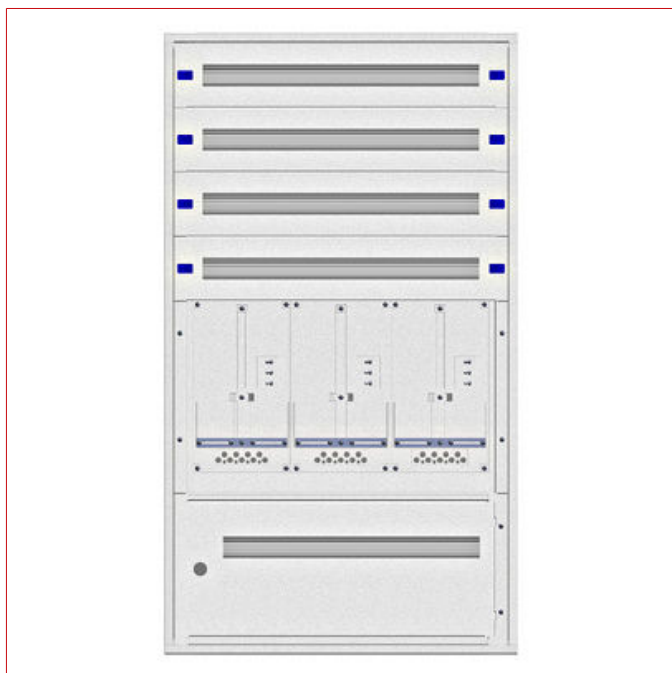

Technical Data

Net width (mm)	720,00
Net height (mm)	1.290,00
Netto depth (mm)	102,00
EAN	9004840975727
Product category	Zählerverteilereinsatz
Austrian province	Styria
Inserts	front plates plastic
Colour	RAL 7035
Meter width	3
HU	28
Meter rows	1
Meter slots	3
Downstream rows	4
Front Plate Material	Sheet steel
Basic Description	Insert
Module widths	132

Article Table

DESCRIPTION	COPPER WEIGHT (kg/km)	Order No.
Metering insert 3-28E compl. 3 cou. pl. front pl. st. STMK		IL198328-B
Front Plates - Sheet Steel, Meter Panel according to OVE E 8640		
Optional Accessories		
Earthing kit 300 mm/Yf6 ² assembled with all nuts, washer,...		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824