

Changeover Switch Netz-0-Notstrom, modular, 4-pole 63A

Version changeover switch, Rated current 63A, Poles 4, IP Rating IP40 (front), IP00 (terminals), Neutral conductor contacts Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)



Technical Data

Version	changeover switch
Rated current (A)	63
Poles	4
Mounting	DIN-rail
Standard	IEC 60947, EN 60947, VDE 0660
Rated insulation voltage [Ui] (V)	690
Rated impulse withstand voltage [Uimp] (V)	6000
Rated short-time withstand current Icw	1000
Rated conditional short-circuit-current	10kA @ 440V / 6kA @ 690V
Short-circuit protection maximum fuse	63
Frequency (Hz)	50/60


Technical Data - continued

Operating Current	AC-22A - 690V - 63A AC-3 - 690V - 17A AC-3 - 230V - 38A AC-23A - 400V - 41A AC-23A - 690V - 21A AC-21A - 690V - 63A AC-3 - 400V - 36A AC-23A - 230V - 38A
Switching Capacity	AC-3 - 690V - 15kW AC-23A - 230V - 11kW AC-23A - 400V - 22kW AC-23A - 690V - 18.5kW AC-3 - 230V - 11kW AC-3 - 400V - 18.5kW
According to UL 508 / CSA	
Connection type	UL/CSA - AWG 14-6
Operating voltage AC (V)	600
Thermal rated continuous current (A)	63
Active Power	3x240VAC - 15Hp 3x120VAC - 5Hp 3x480VAC - 25Hp 1x240VAC - 10Hp 3x600VAC - 30Hp 1x120VAC - 3Hp
Connections	
Conventional thermal current Ith (A)	63
Tightening torque (Nm)	3
Connection cross-section, multi-wire (mm ²)	2,5-16
Connection cross section, single wire (mm ²)	2,5-16
Connection cross-section, flexible wire with ferrule (mm ²)	2,5-16
Retrofit contacts	
Auxiliary contacts	Maximum 2x INSHK001 -- permitted. 1x can be snapped onto the left side of the main contact and 1x onto the right side of the main contact. Maximum configuration 2x NO / 2x NC (1x NO / 1x NC per switching position). ATTENTION! Switching behavior is not the same! In the "NETZ" switching position, only the auxiliary contacts that have been snapped onto the corresponding main contact will switch. In the "NOTSTROM" switching position, only the auxiliary contacts that have been snapped onto the corresponding main contact will switch.
Neutral conductor contacts	Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)
Operating temperature	-25°C to +55°C
Mechanical durability	100000 switching cycles
Power loss per pole (W)	3,60


Technical Data - continued

Protection against direct contact	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP Rating	IP40 (front), IP00 (terminals)
Lockable	No
Net length (mm)	89,40
Net width (mm)	78,40
Net height (mm)	45,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	55

Schaltbild INSR4463--




Maßbild INSR4463--

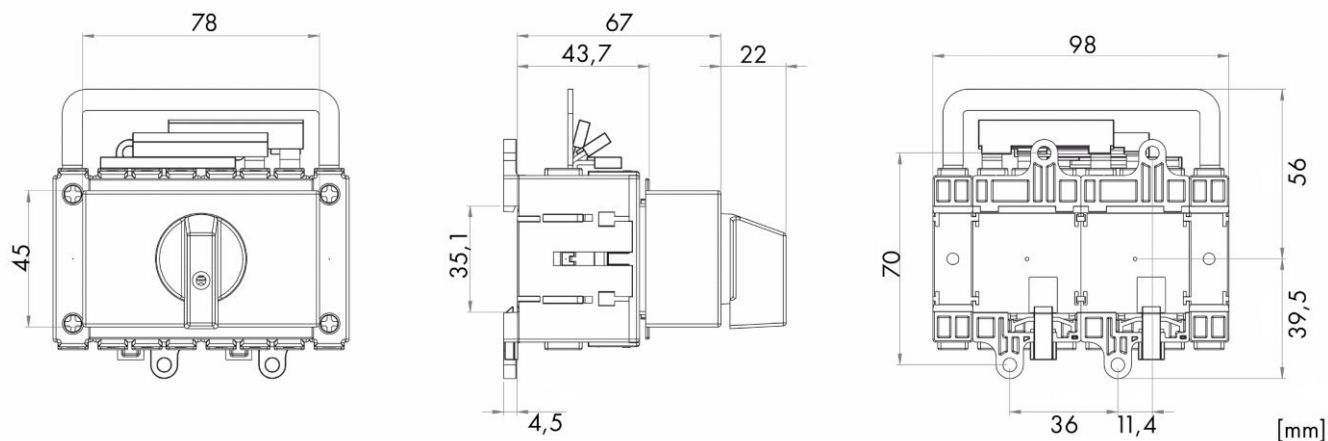


Montageanleitung INSHK Hilfskontakte

Hilfskontakt
Auxiliary contact
INSHK001--

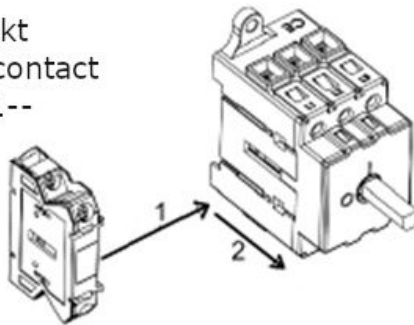

Montageanleitung INSR Hutschienenmontage Schalter

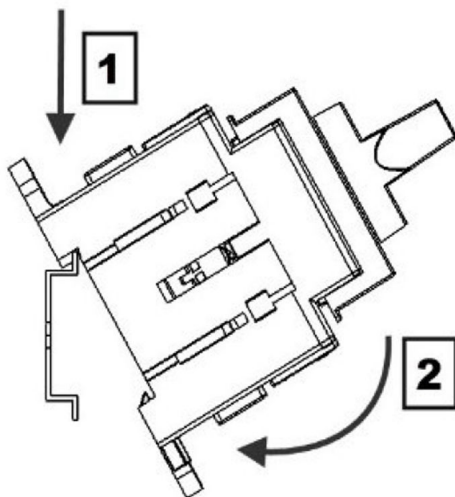

Article Table

DESCRIPTION	Order No.
Changeover Switch Netz-0-Notstrom, modular, 4-pole 63A Version changeover switch, Rated current 63A, Poles 4, IP Rating IP40 (front), IP00 (terminals), Neutral conductor contacts Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)	INSR4463
Optional Accessories	
Auxiliary Contact 1NO/1NC for INSR, INSP and INSA Nicht für INSE zu verwenden, Version accessories, IP Rating IP20 (terminals)	INSHK001