

Data Sheet for Article: BK060003--

Marshalling distributor IP30 H=600 W=600 D=120mm sheet metal

each gland plate with cable entries: 14x13mm, 8x17mm and 2x30mm



SCHRACK-Info

- Marshalling Distributors in three different sizes
- Large space for connecting cables and wires
- Push-through entry possible from four sides (top, bottom, left and right)
- Cover front opening with four twist locks
- Each distributor with two earthing possibilities
- Material:
 - BK060001: 1 mm galvanised sheet steel
 - BK060002: 1.5mm galvanised sheet steel
 - BK060003: 1.5mm galvanised sheet steel
- Wall-mounting:
 - 4x Holes with Ø8.5mm each in the rear panel
 - Mounting material is not included
- Gland plates:
 - Standard size: W=195 D=63mm
 - Quantity:
 - BK060001: 4 pieces,
 - BK060002: 6 pieces,
 - BK060003: 8 pieces


- Cable entries:
 - 14x13mm,
 - 8x17mm,
 - 2x30mm
- Protection class: I
- Degree of protection: IP30
- Impact resistance: IK07



Technical Data

Net width (mm)	600,00
Net height (mm)	600,00
Netto depth (mm)	120,00
Net weight (kg)	10,07
EAN	9004840852592
Power loss (W)	-141,00
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40

Technical Details - Marshalling Distributors

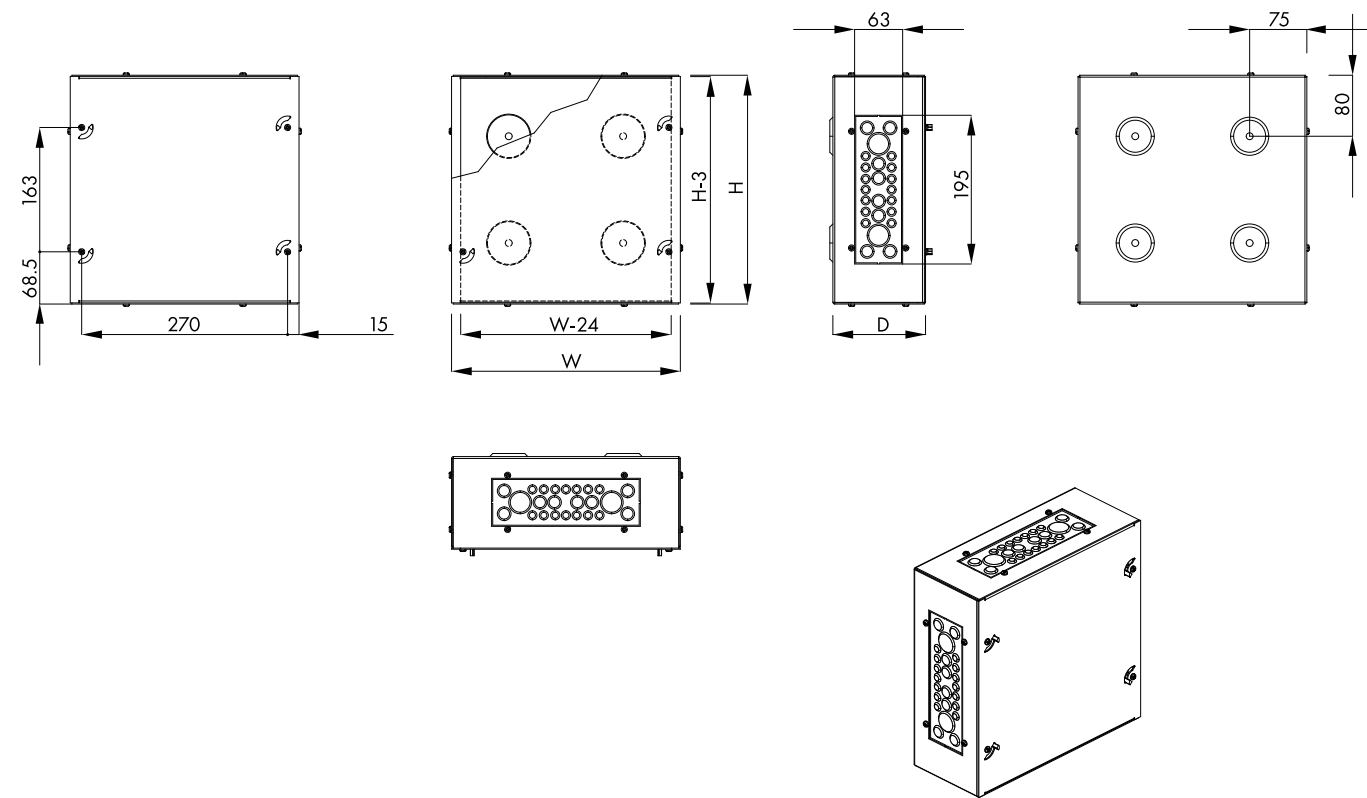

[mm]

Technical Details

Article number	Housing (mm)			Material thickness	Number of Gland plates	Number of fixings		Weight (kg)	Radiant power loss (W) *
	H	W	D			Cover	Rear panel		
BK060001	300	300	120	1	4	4	4	3.40	-46
BK060002	300	600	120	1.5	6	4	4	6.70	-83
BK060003	600	600	120	1.5	8	4	4	10.10	-141

* Max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$.

Article Table

DESCRIPTION	Order No.
Marshalling distributor IP30 H=600 W=600 D=120mm sheet metal each gland plate with cable entries: 14x13mm, 8x17mm and 2x30mm	BK060003
Optional Accessories	
Threaded plate M4 galvanized steel H=18,5 W=10 D=4mm	IG714314
Sliding nut M5 (PU=100 pieces)	IL900230-F
Threaded plate M5 galvanized steel H=18,5 W=10 D=4mm	IG714315