

Data Sheet for Article: BK080756--

Wall-mounted media enclosure 2-rows, 36MW, IP40, white door

H=361 W=396 D=112mm, protection class 2, ABS, halogen free, RAL 9003, with perforated mounting plate



SCHRACK-Info

- Wall-mounted Media enclosures in ABS with solid plastic doors
- Lock: push-button, a small cylinder can be installed
- includes perforated Mounting Plate
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection: IP40, Impact resistance: IK08
- RAL9003 signal white



Technical Data

Net width (mm)	396,00
----------------	--------

Technical Data - continued

Net height (mm)	361,00
Netto depth (mm)	112,00
Net weight (kg)	2,50
EAN	9004840889987
Power loss (W)	-41,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Halogen-free	Yes


Datei Tabelle: Wall-mounted media enclosure 2-rows, 36MW, IP40, white door

Article number	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Radiant power loss [W]*
BK080752	361	287	112	232	180	-32
BK080753	485	287	112	357	180	-41
BK080755	653	287	112	460	158	-54
BK080756	361	396	112	210	267	-41
BK080757	526	396	112	335	267	-56
BK080758	655	396	112	460	267	-68

* Max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$.

Detailed information and legal notes see page 9

Dimensioned drawing: Wall-mounted media enclosure 2-rows, 36MW, IP40, white door

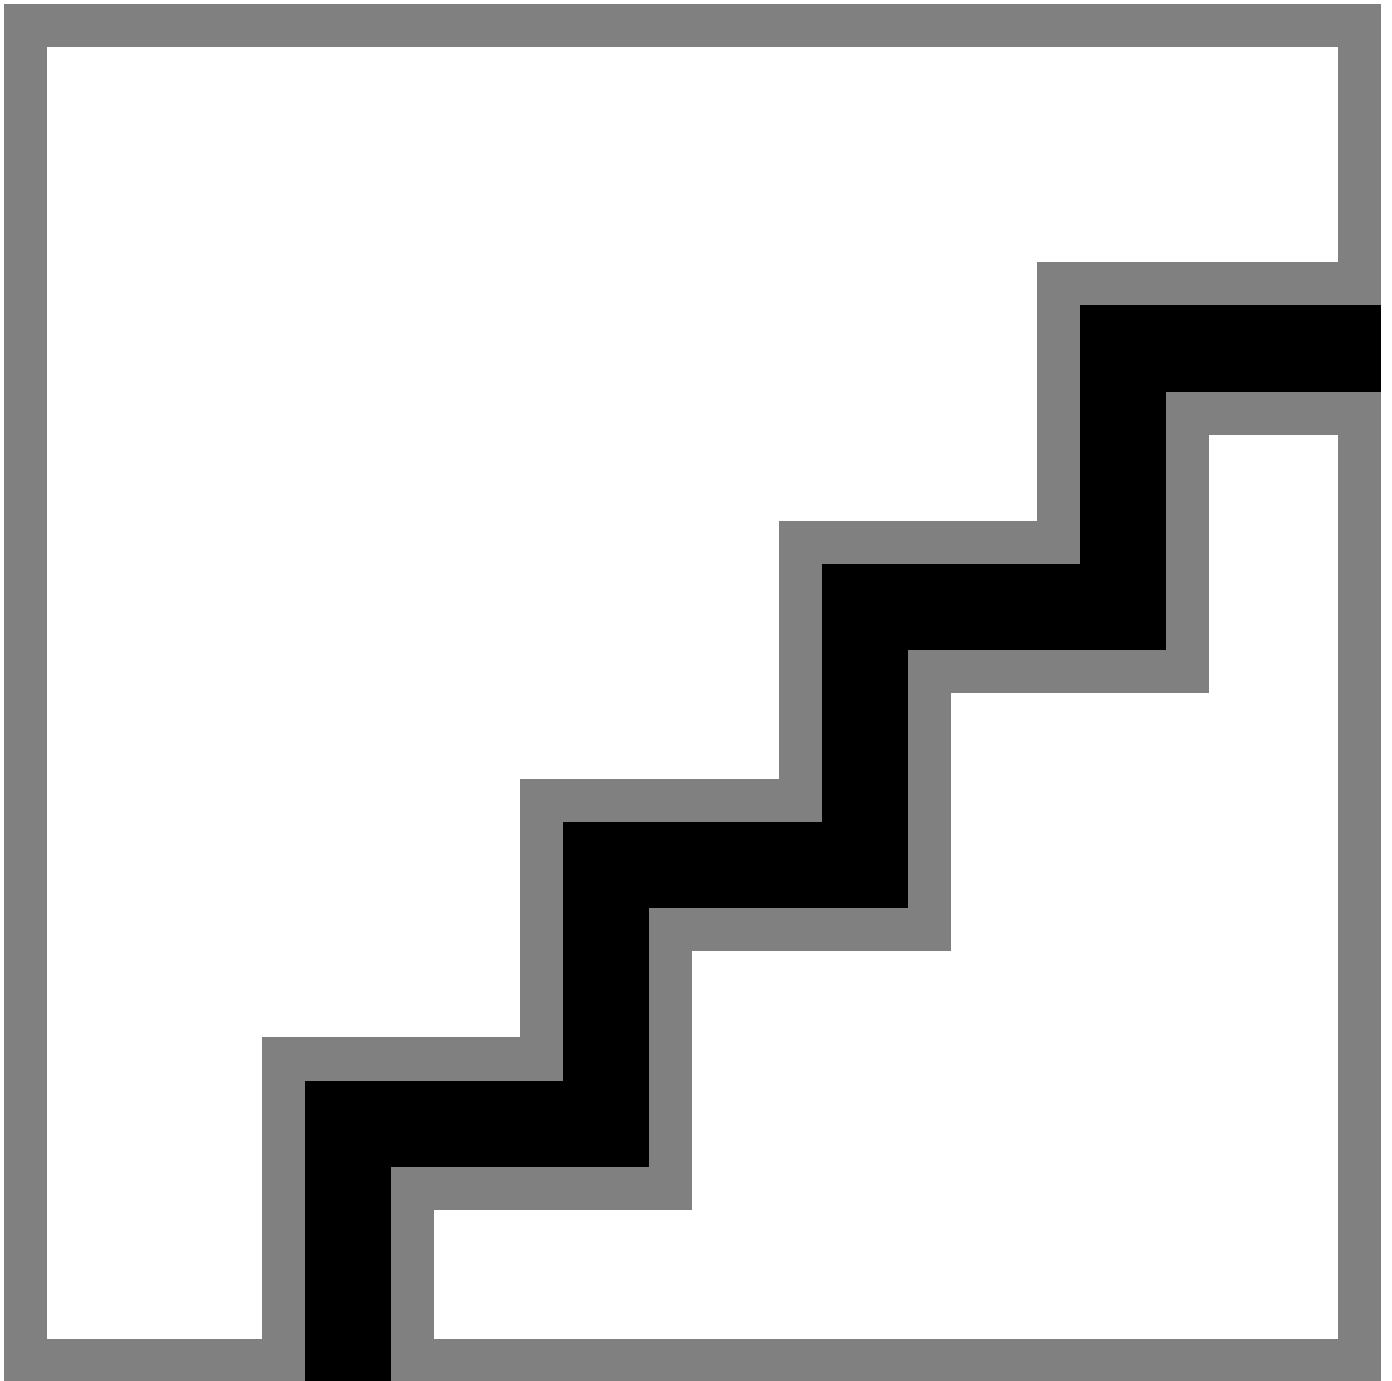

Article Table

DESCRIPTION	NVP (%)	COPPER WEIGHT (kg/km)	Order No.
Wall-mounted media enclosure 2-rows, 36MW, IP40, white door H=361 W=396 D=112mm, protection class 2, ABS, halogen free, RAL 9003, with perforated mounting plate			BK080756
Optional Accessories			
Terminal block with 2x15 screw terminals			BK080098
Round cylinder sash lock 2233 for TOPO BK0800 + BK0801 metal, 2x keys included			BK080096
Double socket 16A, 250VAC, with mounting bracket for BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal), BK0857 = flush-mounted media enclosures, BK0807 = wall-mounted media enclosures, integrated socket not approved for sale in Switzerland			BK085050
DIN-rail adapter empty for 1 module (SFA)(SFB), RAL7035 Lightgrey			HSEH010GS
TOOLLESS LINE Jack RJ45 shielded, Cat.6a 10GB 4PPoE 100W (SFA)			HSEMRJ6GWA
S/FTP Cable Cat.7, 4x2xAWG23/1, 1.000MHz, LS0H-3, Cca, 50% blue RAL5015, Sale per meter	79	28	HSEKP423CB
Terminal block with 2x8 screw terminals			BK080097