
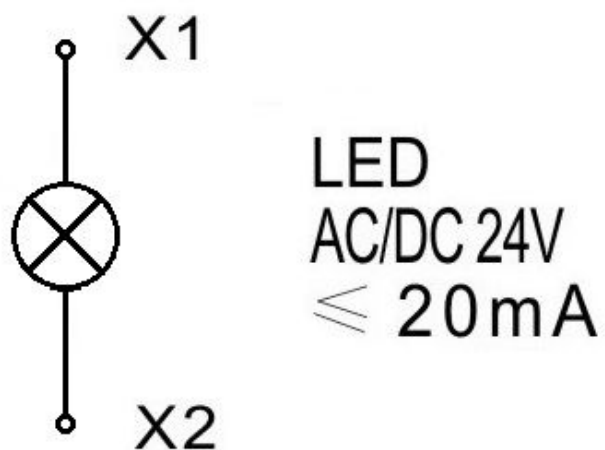


LED-indicator monobloc 24VAC/DC yellow

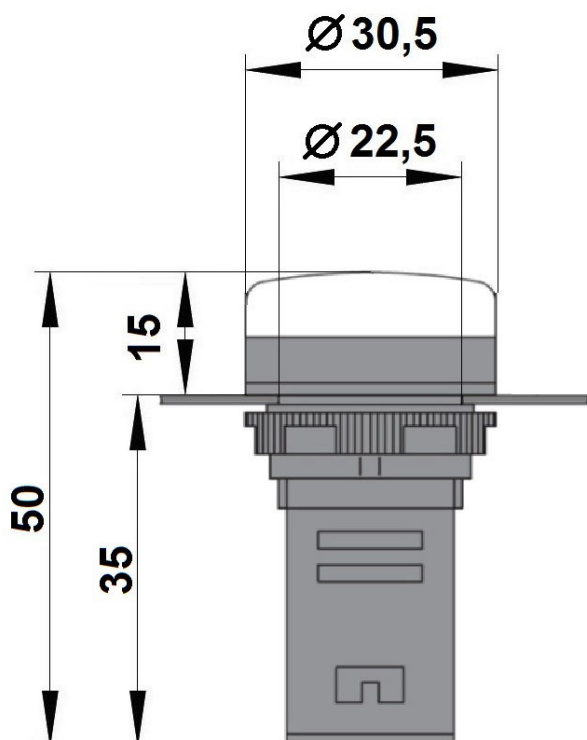

Technical Data

Series	BZ
Illumination	illuminated
Colour	Yellow
Operating voltage AC (V)	24
Operating voltage DC (V)	24
Make-up	LED
IP Rating	IP65
Optional Accessories	LP412402--
Rated operational current (A)	<0,02
Service life	<30000
Brightness (cd/m²)	60
Operating temperature	-5°C to +70°C
Humidity (%)	90% humidity at 20°C 50% humidity at 40°C
Operating height (m)	<2000
Overvoltage category/pollution degree	III / 3
Standard	IEC EN 60947-5-1

Circuit diagram: LED-indicator monobloc 24VAC/DC yellow**Dimensioned drawing: LED-indicator monobloc 24VAC/DC yellow**

Article Table

DESCRIPTION	Order No.
LED-indicator monobloc 24VAC/DC yellow	BZ501211-B
Optional Accessories	
Single-phase Power Supply pulsing 230VAC/24VDC, 2,5A at 50°C electronic power supply, housing for DIN rail mounting, parallel switching not possible	LP412402