


Data Sheet for Article: DSRT4785-B

# Double wing door metal perfor.80% DS/DST/DSS(IP20) 47U, W=800

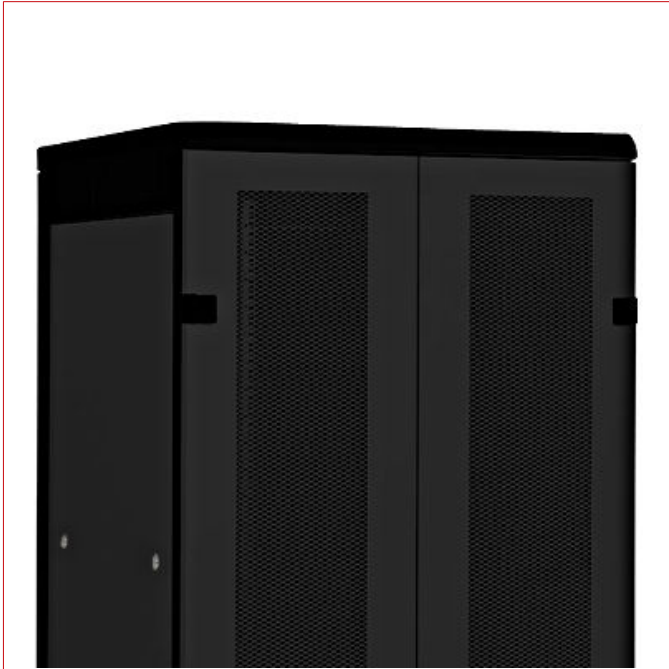

## SCHRACK-Info

All Doors are constructed for installation to SCHRACK free-standing Data-enclosures DS, DST and DSS.

Doors can be installed in front as a replacement of the standard metal door perforated or in the rear instead of the rear-panel.

Installation of door in the rear enables easier and quicker access to the backside of installed components for repair, maintenance or exchange.

Glassdoors to be used if it is necessary to look at installed components.

Perforated Metaldoors for enhanced passive cooling of the installed active equipment..

Double-wing doors are used in case of limited space for opening of doors.

- Material:
  - Steel
  - Door glass: safety hardened, thickness 4 mm
- Color: RAL9005 Black
- IP protection: IP20
- Comfort swinghandle prepared for halfcylinder-lock.
- Installation:
  - Front: Instead of standard metal door perforated
  - Rear: Instead of standard metal door perforated double wing
- Hinges: 3 pcs. at 42U and 47U doors
- Hinging: Right. Quick and easy changing to hinging left.
- External hinge system allows up to 180 degree door opening angle.
- Supply includes all materials needed for installation in front or rear.

## Technical Data

|                                   |                  |
|-----------------------------------|------------------|
| Net width (mm)                    | 800,00           |
| Net height (mm)                   | 2.100,00         |
| Netto depth (mm)                  | 24,00            |
| Net weight (kg)                   | 17,00            |
| Min. ambient temperature (°C)     | 0                |
| Max. ambient temperature (°C)     | 40               |
| Suitable for enclosure width (mm) | 800              |
| Suitable for HU                   | 47U-2195mm       |
| Colour                            | RAL 9005 (black) |

| DESCRIPTION                                                  | Order No.  |
|--------------------------------------------------------------|------------|
| Double wing door metal perfor.80% DS/DST/DSS(IP20) 47U,W=800 | DSRT4785-B |