



Data Sheet for Article: DW125540--

Network Enclosure Wall DW Flat Pack, W550xH580xD400, 19", 12U



SCHRACK-Info

TECHNICAL DATA

- Steel sheet
- Heights: 4, 6, 9, and 12U
- Width: 550mm
- Depth: 400mm
- Colour: hellgrey RAL 7035
- Degree of protection: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: 130°
- 19"- rails (2 pcs.) galvanized. Step-adjustable in the front cabinet part.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (1x). Covered with „break-out style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Passive cooling by sharing heat with environment via chassis
- space between front vertical 19"-rail and door glass at max. spacing: W550 – 35mm
- Earthing:
M8-Earthing point in the rear of the cabinet
Earthing cables for connection to all dismountable parts included in delivery.
- Wide range available accessories (fans, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.)
- Units of measurement: Inch: 1" = 25,4mm, Unit (Height Unit): 1U = 1,75" = 44,45mm


Technical Data

Net width (mm)	550,00
Net height (mm)	580,00
Netto depth (mm)	400,00
Net weight (kg)	18,40
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40
Suitable for HU	12U-580mm
Product	Data-Enclosures Wallmounting Flatpack IP20
Colour	RAL 7035 (Light grey)
Roof fan unit option	no
Basic Description	Enclosure


Datei Tabelle: Network Enclosure Wall DW Flat Pack, W550xH580xD400, 19", 12U

Typ	A	B	C	D	E	R1	R2	Gross Weight (kg)	Net Weight (kg)	Recommended Maximum load (kg)
	(mm)									
DW045540--	230	180	505	550	400	180	435	11,4	11,2	35
DW065540--	320	270	505	550	400	270	435	13,6	13,3	
DW095540--	463	412	505	550	400	412	435	17,4	17,1	
DW125540--	590	530	505	550	400	530	435	19,7	19,4	

Dimensioned drawing: Network Enclosure Wall DW Flat Pack, W550xH580xD400, 19", 12U

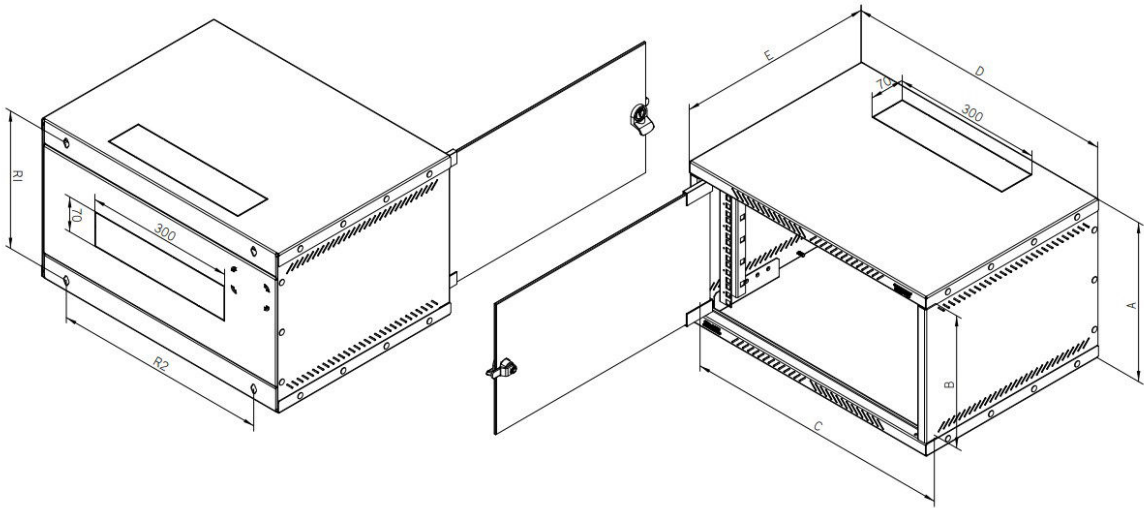

Schnittansicht der vertikalen 19"-Profilschienen

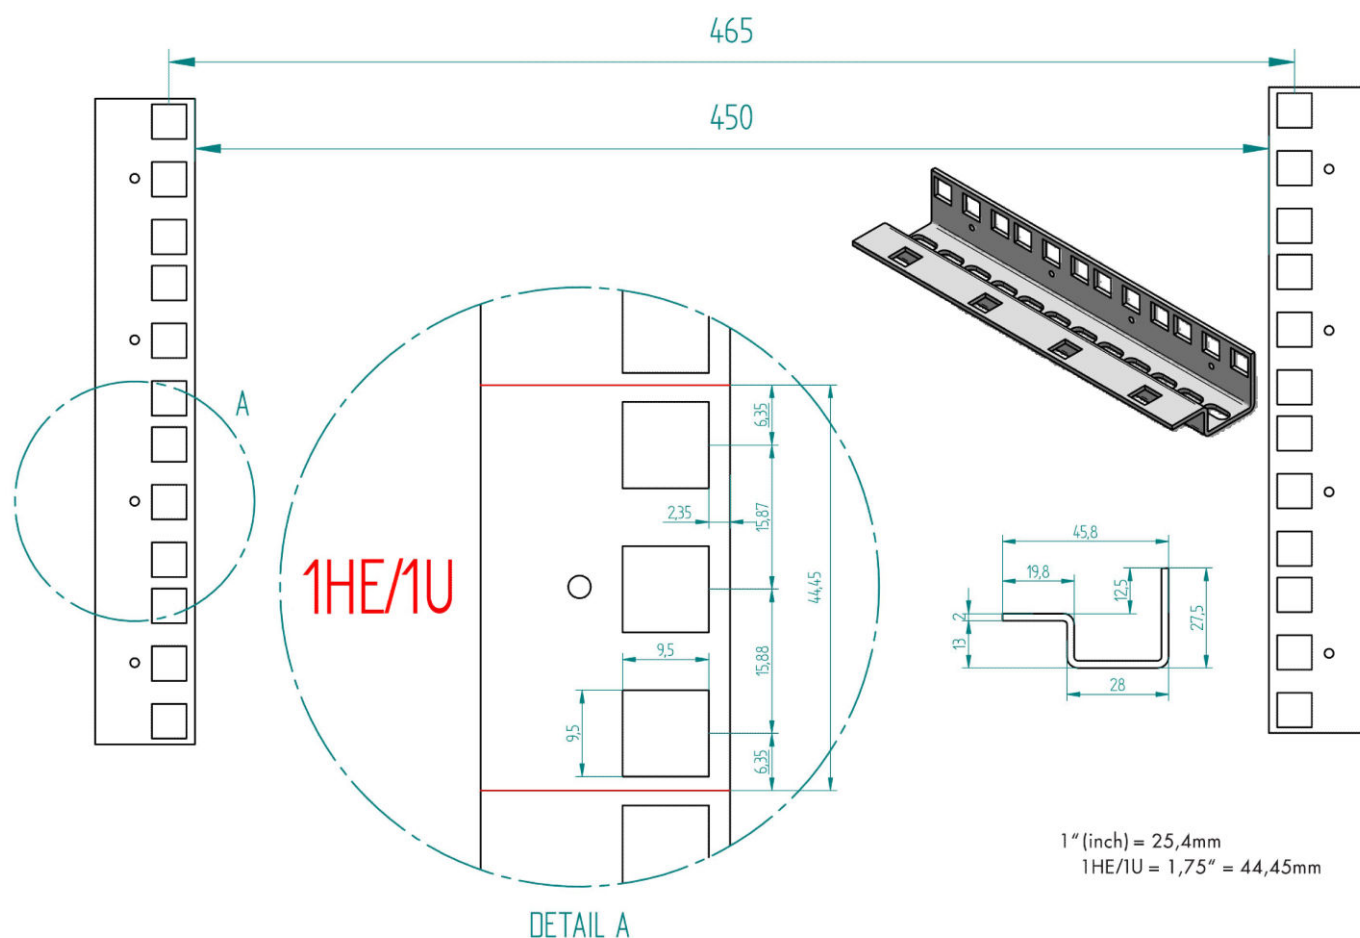

Article Table

DESCRIPTION	Order No.
Network Enclosure Wall DW Flat Pack, W550xH580xD400, 19", 12U	DW125540
Optional Accessories	
19" Shelf Fix, up to 50kg Load, D=350mm, 1U, RAL7035	DFS14835-C
19" Mounting set M6, 50 pcs. each: screw, nut, washer	DSSRA050
Light unit LED, magnet, 230VAC, with door switch sensor automatically in operation as soon as the door is opened, external PSU	DTLIGHT01
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU	QLGSW2457
Metal-Chassis, 19"	
Patchpanel 19" empty for 24 modules (SFA)(SFB), 1U, RAL7035	HSER0240GS
Light grey, patchcord lock down	
19" PDU, 9xSchuko, Profile ALU 1U, 2m-cable, RAL7035	IU070114

Article Table

DESCRIPTION	Order No.
Optional Accessories	
19" PDU, 7xSchuko with overvoltage protection, PVC, 1.25U 2m-connector cable, RAL7035	IU070113
19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU ALU Profil	Q7070114-A
19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U 2m-cable, Black, ALU	Q7070113-A