

# Two-way switch, cage clamps, VISIO IP54

Surface mounted, Rated current 10A, Connection type Plug-in terminal



## Schrack-Info

Robust surface-mounted switch made of durable and weather-resistant, fibreglass-reinforced thermoplastic. The switch is IP54 splash-proof and also provides additional protection against dust. Furthermore, it is resistant to chemicals and elevated temperatures and at the same time has a high impact strength (IK05). Inside the switch there is already a connected quick connection terminal for the earthing connection, which allows an even easier connection. Up to three cables can be routed through the sealing diaphragm both above and below the switch.




## Technical Data

|                          |               |
|--------------------------|---------------|
| Net length (mm)          | 83,00         |
| Net width (mm)           | 74,00         |
| Net height (mm)          | 56,00         |
| Net weight (kg)          | 0,11          |
| Series                   | 05-VISIO IP54 |
| Product typ              | Switch        |
| Operating voltage AC (V) | 230           |
| Switching current (AX)   | 10            |
| mounting                 | Wall-mounted  |
| Mounting method          | Screwed       |

## Technical Data - continued

|                             |                  |
|-----------------------------|------------------|
| IP Rating                   | IP54             |
| Colour                      | Grey             |
| Connection type             | Plug-in terminal |
| Allowed cables              | Stiff            |
| Allowed cross-section (mm²) | 1,5 und 2,5      |
| Material                    | ABS<br>Copper    |
| Environment                 | Halogen free     |
| Sustainability              | ROHS             |
| test mark                   | VDE              |
| Dimensions (mm)             | 83x74x56         |

## Abmessungen (mm)

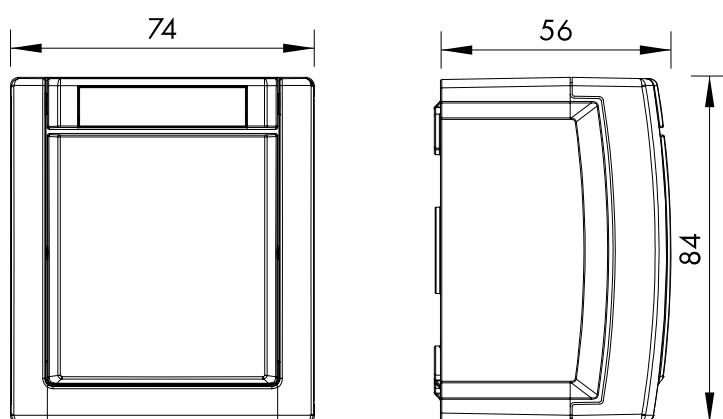

## Article Table

| DESCRIPTION                                                                                                     | Order No. |
|-----------------------------------------------------------------------------------------------------------------|-----------|
| Two-way switch, cage clamps, VISIO IP54<br>Surface mounted, Rated current 10A, Connection type Plug-in terminal | EV210011  |
| <b>Optional Accessories</b>                                                                                     |           |
| Adaptor for vertical add-on, switches, sockets, VISIO IP54<br>Surface mounted, cage clamps, , ABS, ROHS,        | EV217002  |