


Data Sheet for Article: EV210026--

Blinds push button, cage clamps, VISIO IP54

Surface mounted, Rated current 10A, Connection type Plug-in terminal

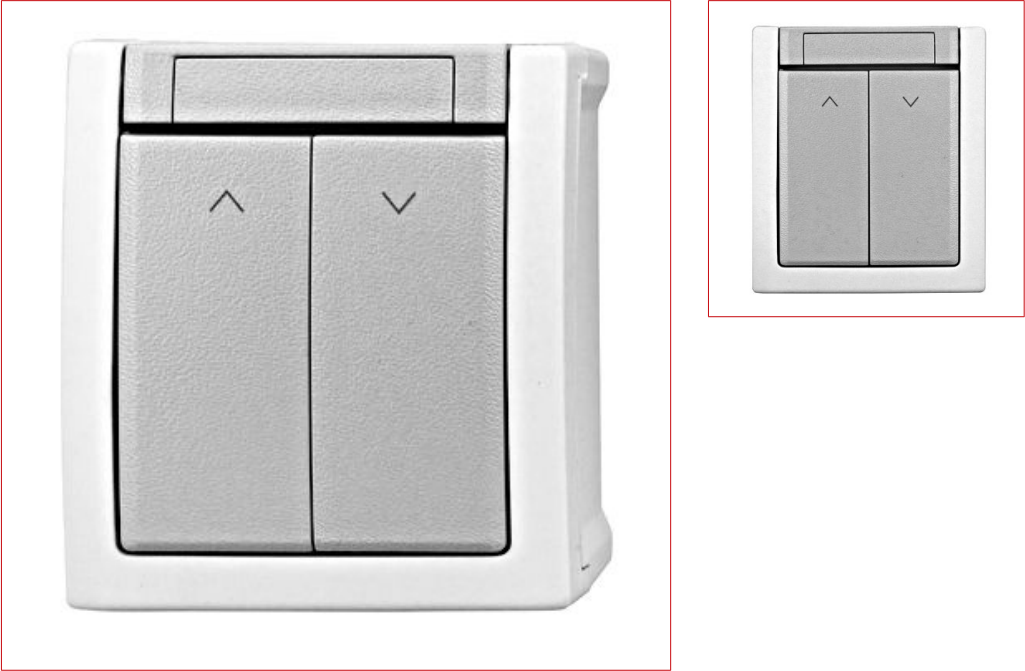

Schrack-Info

Robust surface-mounted pushbutton made of durable and weather-resistant, glass-fibre-reinforced thermoplastic material equipped with an electrical interlock so that simultaneous actuation of the rockers only switches through one output. The switch is IP54 splash-proof and also provides additional protection against dust. Furthermore, it is resistant to chemicals and elevated temperatures and at the same time has a high impact strength (IK05). Inside the switch there is already a connected quick connection terminal for the earthing connection, which allows an even easier connection. Up to three cables can be routed through the sealing diaphragm both above and below the switch.




Technical Data

Net length (mm)	83,00
Net width (mm)	74,00
Net height (mm)	56,00
Net weight (kg)	0,11
Series	05-VISIO IP54
Product typ	Switch
Operating voltage AC (V)	230
Switching current (AX)	10
mounting	Wall-mounted

Technical Data - continued

Mounting method	Screwed
IP Rating	IP54
Colour	Grey
Connection type	Plug-in terminal
Allowed cables	Stiff
Allowed cross-section (mm²)	1,5- 2,5
Material	ABS Copper
Environment	Halogen free
Sustainability	ROHS
test mark	VDE
Dimensions (mm)	83x74x56

Abmessungen (mm)

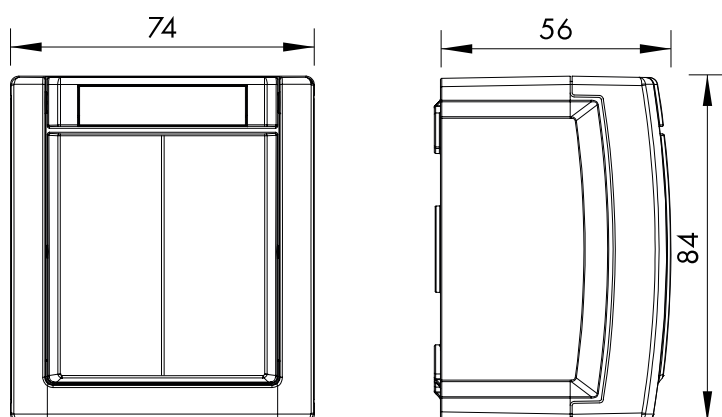

Article Table

DESCRIPTION	Order No.
Blinds push button, cage clamps, VISIO IP54 Surface mounted, Rated current 10A, Connection type Plug-in terminal	EV210026
Optional Accessories	
Adaptor for vertical add-on, switches, sockets, VISIO IP54 Surface mounted, cage clamps, , ABS, ROHS,	EV217002