

Horizontal combination two-way switch & socket outlet

Surface mounted, VISIO IP54, Rated current 10,16A, Connection type Plug-in terminal



Schrack-Info

Robust surface-mounted switch socket outlets Combination of durable and weather-resistant, fibreglass-reinforced thermoplastic material. Switch and socket are IP54 splash-proof and provide additional protection against dust. Furthermore, they are resistant to chemicals and elevated temperatures and at the same time have a high impact strength (IK05). Inside the switch there is already a connected quick connection terminal for the earthing connection, which allows an even easier connection. Up to three cables can be routed through the sealing diaphragm both above and below the switch.




Technical Data

Net length (mm)	168,00
Net width (mm)	74,00
Net height (mm)	60,00
Net weight (kg)	0,21
Series	05-VISIO IP54
Product typ	Switch
Operating voltage AC (V)	230
Switching current (AX)	10

Technical Data - continued

mounting	Wall-mounted
Mounting method	Screwed
IP Rating	IP54
Colour	Grey
Connection type	Plug-in terminal
Allowed cables	Stiff
Allowed cross-section (mm²)	1,5 und 2,5
Material	ABS Copper
Environment	Halogen free
Sustainability	ROHS
test mark	VDE
Dimensions (mm)	168x74x56

Abmessungen (mm)

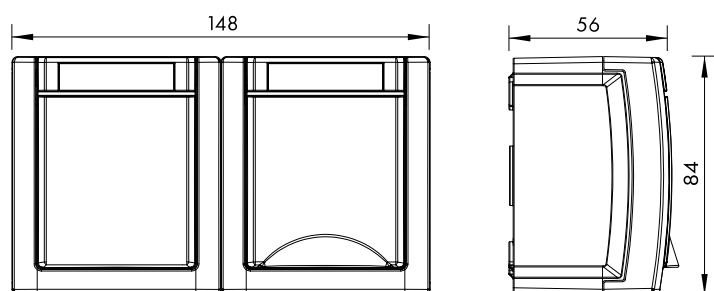

Article Table

DESCRIPTION	Order No.
Horizontal combination two-way switch & socket outlet Surface mounted, VISIO IP54, Rated current 10,16A, Connection type Plug-in terminal	EV211017
Optional Accessories	
Adaptor for vertical add-on, switches, sockets, VISIO IP54 Surface mounted, cage clamps, , ABS, ROHS,	EV217002