

Data Sheet for Article: EV211018--

Horizontal combination three-gang socket outlet, VISIO IP54

Surface mounted, Rated current 16A, Connection type Plug-in terminal, Grey



Schrack-Info

Robust surface-mounted protective contact socket outlet made of durable and weather-resistant, glass-fibre reinforced thermoplastic. The socket is IP54 splash-proof and offers additional protection against dust. Furthermore, it is resistant to chemicals and elevated temperatures and at the same time has a high impact strength (IK05). Up to three cables can be routed through the sealing diaphragm both above and below the switch.




Technical Data

Net length (mm)	84,00
Net width (mm)	222,00
Net height (mm)	60,00
Net weight (kg)	0,31
Series	05-VISIO IP54
Product typ	Shockproof socket
Operating voltage AC (V)	230
mounting	Wall-mounted

Technical Data - continued

Mounting method	Screwed
IP Rating	IP54
Colour	Grey
Connection type	Plug-in terminal
Allowed cables	Stiff
Allowed cross-section (mm²)	1,5 und 2,5
Material	ABS Copper
Environment	Halogen free
Sustainability	ROHS
test mark	VDE
Dimensions (mm)	222x84x56

Abmessungen (mm)

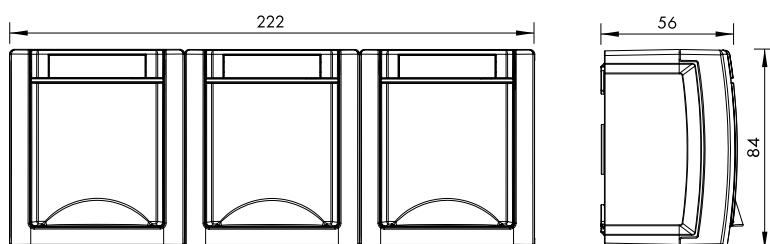

Article Table

DESCRIPTION	Order No.
Horizontal combination three-gang socket outlet, VISIO IP54	EV211018
Surface mounted, Rated current 16A, Connection type Plug-in terminal, Grey	
Optional Accessories	
Adaptor for vertical add-on, switches, sockets, VISIO IP54	EV217002
Surface mounted, cage clamps, , ABS, ROHS,	