



Data Sheet for Article: HLP09D041P

FTTH FO Pigtail SC/APC 8°, 9/ 125µm OS2 G657.A2, 1.0m, 4 pcs

Easy Strip, colored according to IEC 60304, CLASSIC

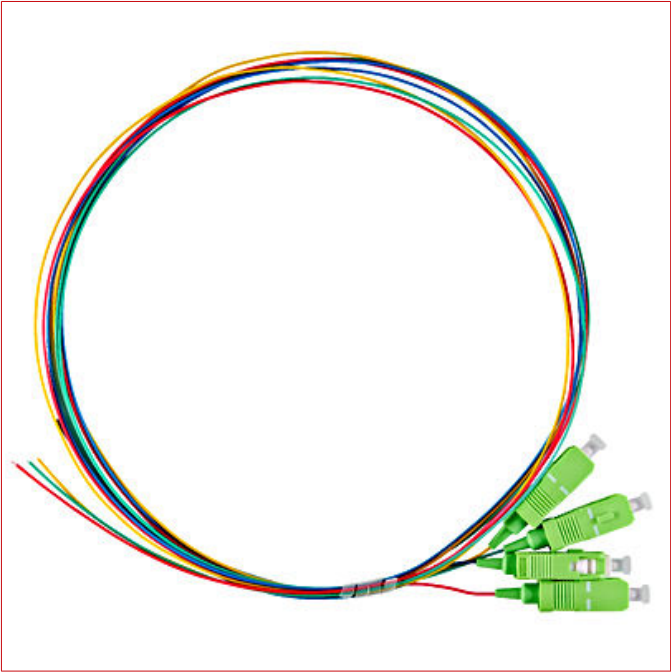


Schrack-Info

Assignment is crossed out.

Technical Data

Net width (mm)	120,00
Net height (mm)	15,00
Net weight (kg)	0,12
Product standard	IEC 61300-3-4 / IEC 61300-3-6
Combination of connectors	SC/APC
Connector type	SC/APC 8° Ferrule
Fiber	9/125 OS2 Singlemode / G.657.A2
Cable jacket	LSOH
Insertion loss typical (dB)	≤0,25
Return loss typical (dB)	≥60
Wavelength (nm)	1310
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	75

**Dimensioned drawing: FTTH FO Pigtail SC/APC 8°, 9/125µm OS2 G657.A2,
1.0m, 4 pcs**

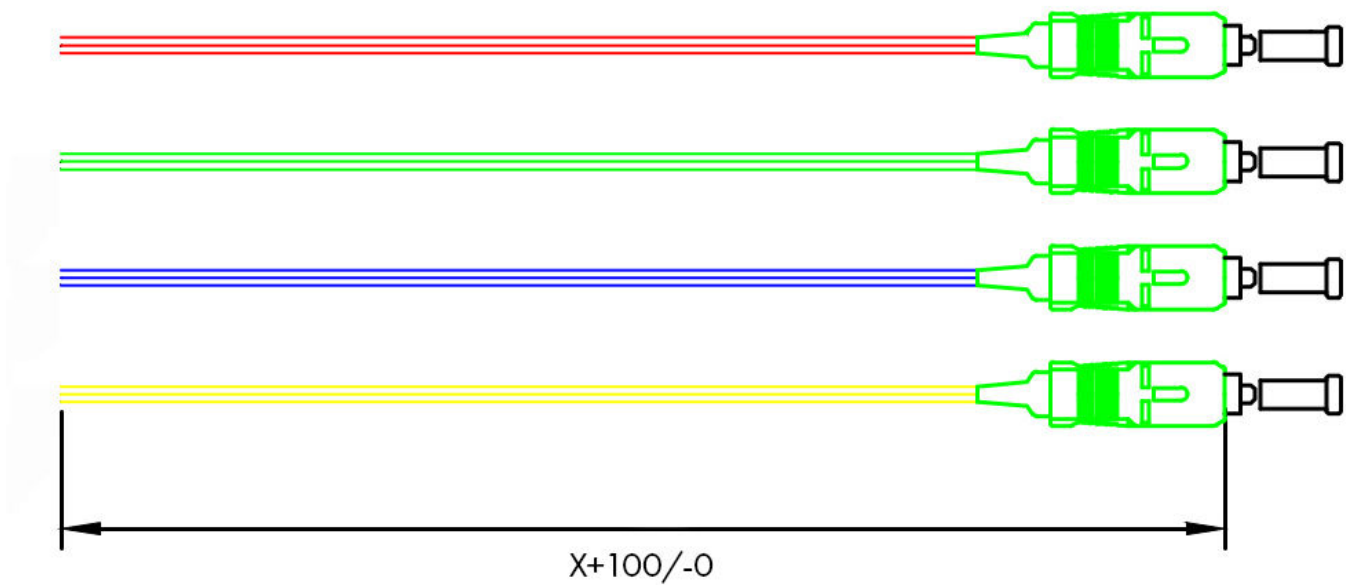

DESCRIPTION	Order No.
FTTH FO Pigtail SC/APC 8°, 9/125µm OS2 G657.A2, 1.0m, 4 pcs Easy Strip, colored according to IEC 60304, CLASSIC	HLP09D041P