

Data Sheet for Article: HLP19MD03F

FTTH Patchcord Simplex LC/APC - SC/APC, 9/125µm OS2, 3.0m


LS0H, white



Technical Data

Net width (mm)	200,00
Net height (mm)	300,00
Net weight (kg)	0,03
Product standard	IEC 61300-3-4 / IEC 61300-3-6
Connector standard	IEC 61754
Combination of connectors	LC APC/SC APC
Patchcordlength (m)	3,0
Fiber	9/125 OS2 Singlemode
Cable jacket	LS0H
Colour	White
Diameter (mm)	2
Insertion loss typical (dB)	≤0,25
Return loss typical (dB)	≥60
Wavelength (nm)	1310
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	60

Dimensioned drawing: FTTH Patchcord Simplex LC/APC - SC/APC, 9/125µm OS2, 3.0m

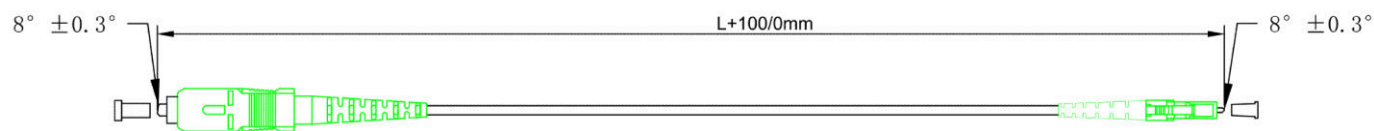

DESCRIPTION	Order No.
FTTH Patchcord Simplex LC/APC - SC/APC, 9/125µm OS2, 3.0m LSOH, white	HLP19MD03F