



Data Sheet for Article: HLP23TC05F

FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 5.0m

LSOH, aqua

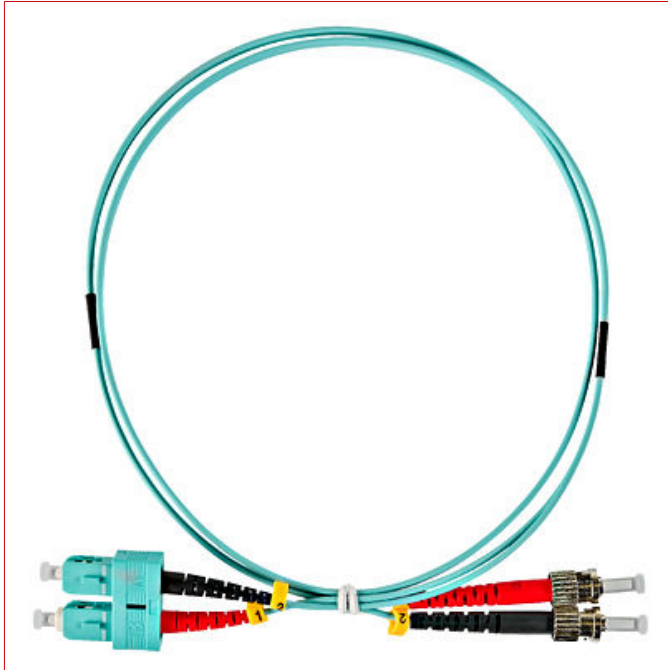

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- ST/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM

OM3 LS0H

Technical Data

Product standard	IEC 61300-3-4 / IEC 61300-3-6
Connector standard	IEC 61754
Combination of connectors	SC/ST
Patchcordlength (m)	5,0
Fiber	50/125 OM3 Multimode
Cable jacket	LS0H
Colour	Aqua
Insertion loss typical (dB)	≤0,25
Return loss typical (dB)	≥30
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	60
Net width (mm)	200,00
Net height (mm)	300,00
Net weight (kg)	0,27

Dimensioned drawing: FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 5.0m

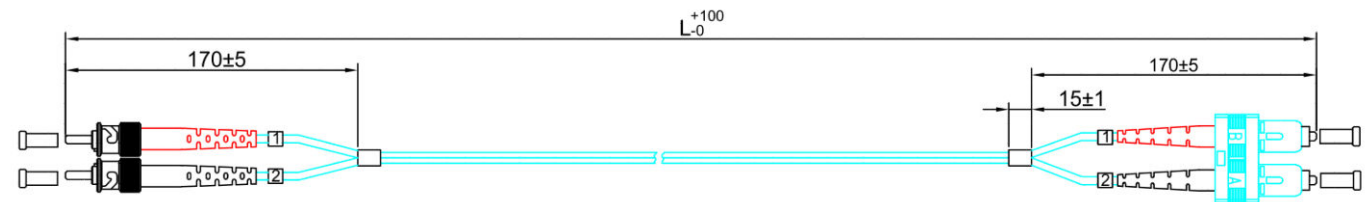

DESCRIPTION	Order No.
FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 5.0m LS0H, aqua	HLP23TC05F