

Data Sheet for Article: HSELS04SCG

FO Patchpanel 19", 1U, sliding, for 4 fibers, SC, SM




RAL7035, PREMIUM



Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Fiber	9/ 125 OS2 Singlemode
Colour	RAL 7035 (Light grey)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70

Dimension drawing

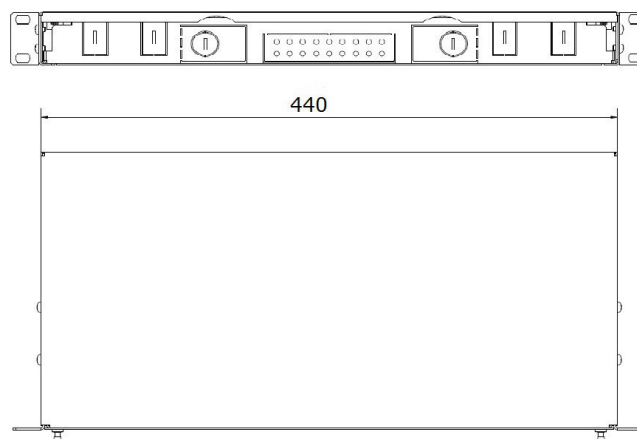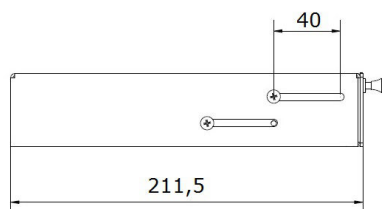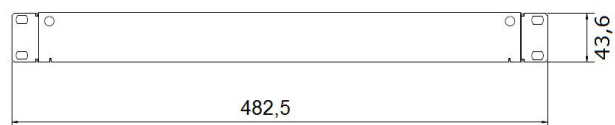

Article Table

DESCRIPTION	Order No.
FO Patchpanel 19", 1U, sliding, for 4 fibers, SC, SM RAL7035, PREMIUM	HSELS04SCG
Optional Accessories	
FO Patchcord Duplex SC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29CC02F
FO Patchcord Duplex SC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29CC05F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29LC05F
FO Patchcord Duplex ST/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29TC02F
FO Patchcord Duplex ST/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29TC05F
FO Patchcord Duplex SC/UPC - FC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29CF02F
FO Patchcord Duplex SC/UPC - FC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29CF05F