





Технічний паспорт статті: HSELS125LG

FO Splicebox, 12 Fibers, LC, 50/125µm OM2, 19", 1U, Class B

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM



SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open



Standards:

50173-1, EN 61300-3-6, EN 61300-3-63

Технічні дані

Ширина мережі (mm)	482,50
Чиста сума (mm)	43,60
Глибина мережі (mm)	211,50
Вага нетто (kg)	2,70
волокно	50/125 OM2 Багатомодовий
Колір	RAL 7035 (Світло-сірий)
Мінімальна температура навколишнього середовища (°C)	-10
Максимальна температура навколишнього середовища (°C)	70
Кількість волокон	12
Муфта/штекер	ЛК

Dimension drawing

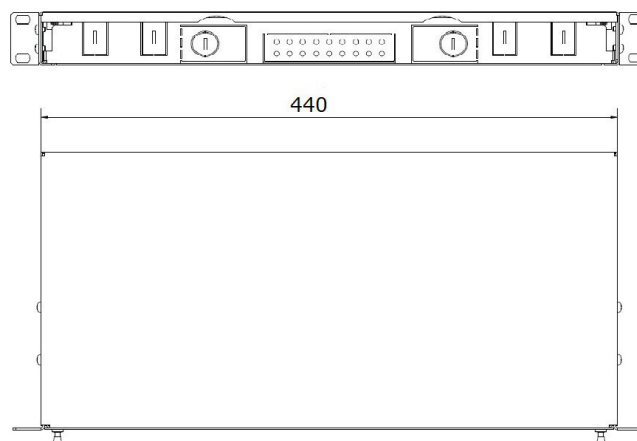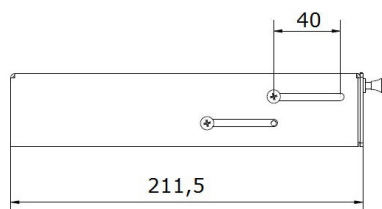

Таблиця статей

ПОЗНАЧЕННЯ	НОМЕР АРТИКУЛА
FO Splicebox, 12 Fibers, LC, 50/125µm OM2, 19", 1U, Class B acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	HSLS125LG
Додаткові аксесуари	
FO shrink splice protector 60mm LVZ0007	HELSP00011
FO shrink splice protector 45mm LVZ0006	HELSP00010
FO Patchcord Duplex LC/LC, 50/125µm OM2, LS0H-3, orange, 2.0m	HLP25LL02F
FO Patchcord Duplex LC/LC, 50/125µm OM2, LS0H-3, orange, 5.0m	HLP25LL05F
FO Patchcord Duplex LC/SC, 50/125µm OM2, LS0H-3, orange, 2.0m	HLP25LC02F
FO Patchcord Duplex LC/SC, 50/125µm OM2, LS0H-3, orange, 5.0m	HLP25LC05F
FO Patchcord Duplex LC / ST, 50/125µm OM2, LS0H-3, orange, 2m	HLP25LT02F
FO Patchcord Duplex LC / ST, 50/125µm OM2, LS0H-3, orange, 5m	HLP25LT05F