


Data Sheet for Article: HSELS24SLG

FO Patchpanel 19", 1U, sliding, for 24 fibers, LC, SM




RAL7035, PREMIUM



Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Fiber	9/125 OS2 Singlemode
Colour	RAL 7035 (Light grey)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70

Dimension drawing

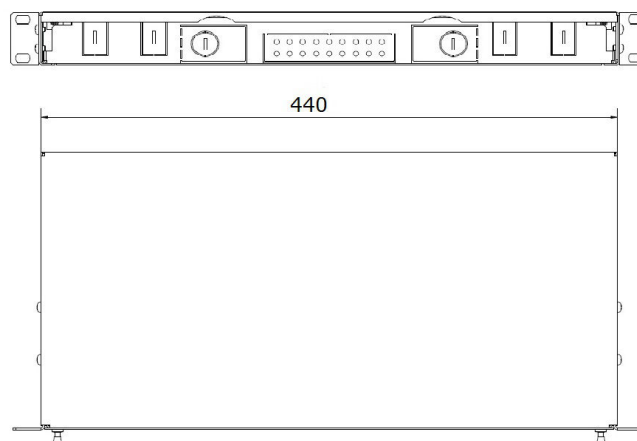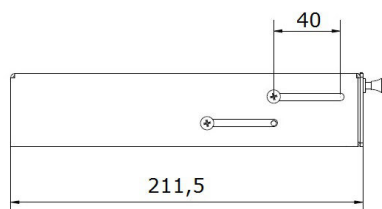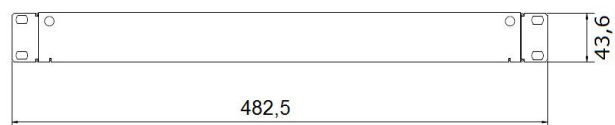

Article Table

DESCRIPTION	Order No.
FO Patchpanel 19", 1U, sliding, for 24 fibers, LC, SM RAL7035, PREMIUM	HSELS24SLG
Optional Accessories	
FO Patchcord Duplex LC/UPC - LC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29LL02F
FO Patchcord Duplex LC/UPC - LC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29LL05F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29LC05F
FO Patchcord Duplex LC/UPC - FC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29LF02F