


Data Sheet for Article: HSELS483CP

FO Splicebox, 48 Fibers, SC, 50/ 125µm OM3, 19", 1U, Class C

acc. to IEC 61753-1, RAL7035, sliding, Pigtails included, CLASSIC

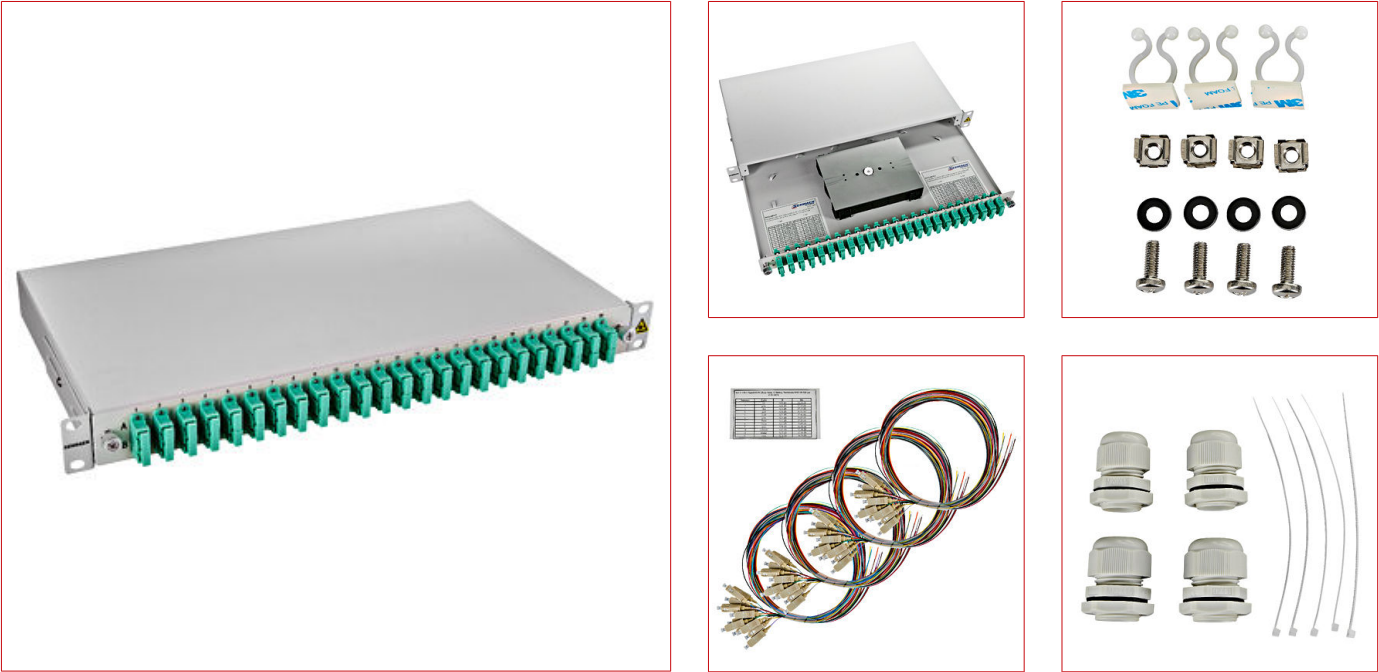

Technical Data

Net width (mm)	480,00
Net height (mm)	44,00
Netto depth (mm)	242,00
Net weight (kg)	2,53
Fiber	50/ 125 OM3 Multimode
Colour	RAL 7035 (Light grey)
Insertion loss typical (dB)	< 0,2
Return loss typical (dB)	> 35
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Fibre count	48

Article Table

DESCRIPTION	Order No.
FO Splicebox, 48 Fibers, SC, 50/125µm OM3, 19", 1U, Class C acc. to IEC 61753-1, RAL7035, sliding, Pigtails included, CLASSIC	HSELS483CP
Optional Accessories	
FO shrink splice protector 60mm	HELSP00011
FO shrink splice protector 45mm	HELSP00010
Fiber Optics Cleaning Tool for SC, ST, FC and E2000 Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	HSELSZT002
FO Power meter with integrated laser light source (VFL) and RJ45-copper cable test. ATTENTION: This is a Laser Class 2 product. Do not stare into the beam. Always keep the cover on the VFL port when not in use. It is recommended to use laser safety glasses when working with fiber optic systems.	HSELSZT003
FO Patchcord Duplex SC/UPC - SC/UPC, 50/125µm OM3, 2.0m LSOH, aqua	HLP23CC02F
FO Patchcord Duplex SC/UPC - SC/UPC, 50/125µm OM3, 5.0m LSOH, aqua	HLP23CC05F
FO Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM3, 2.0m LSOH, aqua	HLP23LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM3, 5.0m LSOH, aqua	HLP23LC05F
FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 2.0m LSOH, aqua	HLP23TC02F
FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 5.0m LSOH, aqua	HLP23TC05F