


Data Sheet for Article: IL172545AS

# Wall-mounted distribution board

## 5A-45K, H:2160 W:1230 D:250mm

15 Installation rows, 855 Module widths, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand

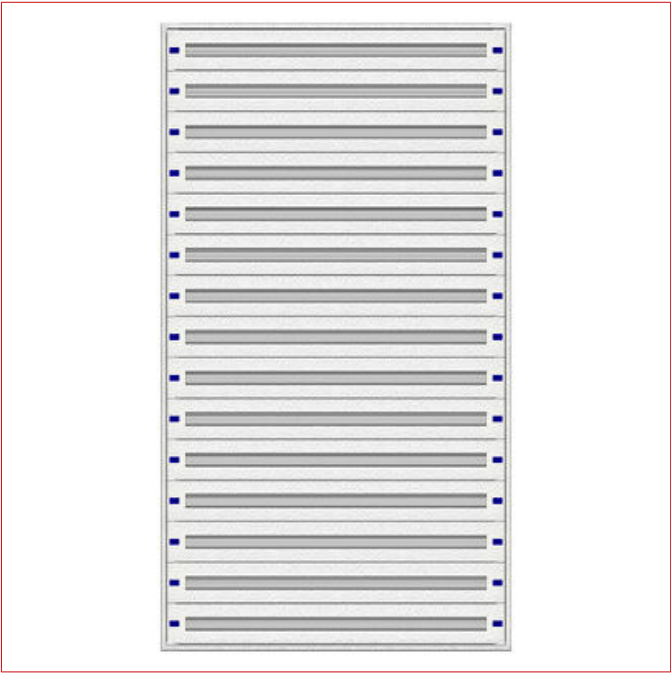

### Technical Data

|                      |                                                      |
|----------------------|------------------------------------------------------|
| Net width (mm)       | 1.230,00                                             |
| Net height (mm)      | 2.160,00                                             |
| Netto depth (mm)     | 250,00                                               |
| EAN                  | 9004840633009                                        |
| Power loss (W)       | -986,00                                              |
| Product category     | Wall-mounted enclosure with modular chassis complete |
| Austrian province    | Standard                                             |
| Colour               | RAL 7035 (Light grey)                                |
| Meter width          | 5                                                    |
| HU                   | 45                                                   |
| IP Rating            | IP20C                                                |
| Protection class     | I                                                    |
| Impact Resistance    | IK08                                                 |
| Modul heights        | 45                                                   |
| Installation rows    | 15                                                   |
| Front Plate Material | Sheet steel                                          |

## Technical Data - continued

|                   |                    |
|-------------------|--------------------|
| Basic Description | Distribution Board |
| Module widths     | 855                |

## Article Table

| DESCRIPTION                                                                                                                                                            | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Wall-mounted distribution board 5A-45K, H:2160 W:1230 D:250mm<br>15 Installation rows, 855 Module widths, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand | IL172545AS |
| <b>Optional Accessories</b>                                                                                                                                            |            |
| Side panels 250mm (1 pair)<br>available for IP20-C and IP54                                                                                                            | IL091125   |
| Base front for wall-mounted enclosure U-Profile, width 5<br>redesigned U-Profile Depth 8mm, 2mm Sheet Steel                                                            | IL091500-S |
| Cam cylinder 61005 for Modul enclosures<br>with 1 key                                                                                                                  | IL900200-F |
| Cam cylinder H36000 C/W with 2 keys                                                                                                                                    | IL900202-F |
| Push through gland plate IP20C, IL001/006/009/036,widths 2-5<br>W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm                                   | IL900102   |
| Push through gland plate IP20C, 18x 18-30 mm cable glands<br>for IL001/006/009/036 widths 2,3,4,5                                                                      | IL900105   |
| Wall-mounting brackets for wall-mounted frames M2000 IP20C                                                                                                             | IL900020-F |
| Name strip 1000 mm long, 10 mm high, self-adhesive                                                                                                                     | BK002401   |
| Blank cover smooth grey RAL 7035, 1000x50x8mm,<br>Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.                            | IL900251   |
| Z-metal-installation-cylinder with 2 keys                                                                                                                              | IL900201-F |