

Datenblatt für Artikel: IU008530--

Cabinet light IP20 with magnetic fastening and socket, 11W

Energy saver bulb, bulb socket 2G7, luminous flux 900lm, 10.000h, terminal 2.5mm² with cable clamp, with on/off switch



SCHRACK-Info

- Slim design
- Excellent for cabinets and enclosures with high component density
- Magnetic fastening
- Can be mounted freely in any desired position in metal enclosures
- Electrical socket
- On/Off switch
- Includes energy saver bulb 11W (2G7)
- Long service life (10.000h)
- Also available:

IU008518: With screw fastening and socket

IU008531: With magnetic fastening and socket type E (for France, Belgium, Poland, Czech Republic and Slovakia)




Technische Daten

Technische Daten - Fortsetzung

Net width (mm)	345,00
Net height (mm)	40,00
Netto depth (mm)	91,00
Net weight (kg)	0,50
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	50
Material	Plastic
Colour	RAL 7035 (Light grey)
Height (mm)	40
Depth (mm)	91
IP Rating	IP20
Protection class	I
Width (mm)	345
Rated voltage	230V-AC
Product category	Cabinet light
Rated current (A)	16
Connection type	Screw clamps
Mounting method	Magnetic
Tightening torque (Nm)	0,8
Mounting type	Vertical / Horizontal
Temperature range - Operation (°C)	-20 to +50
Temperature range - Transport/storage (°C)	-45 to +70
Humidity (%)	max. 90
Light source	Energy saver bulb, socket 2G7
Power consumption	11W
Luminous flux (lm)	900
Service life	10.000h

Dimension drawing

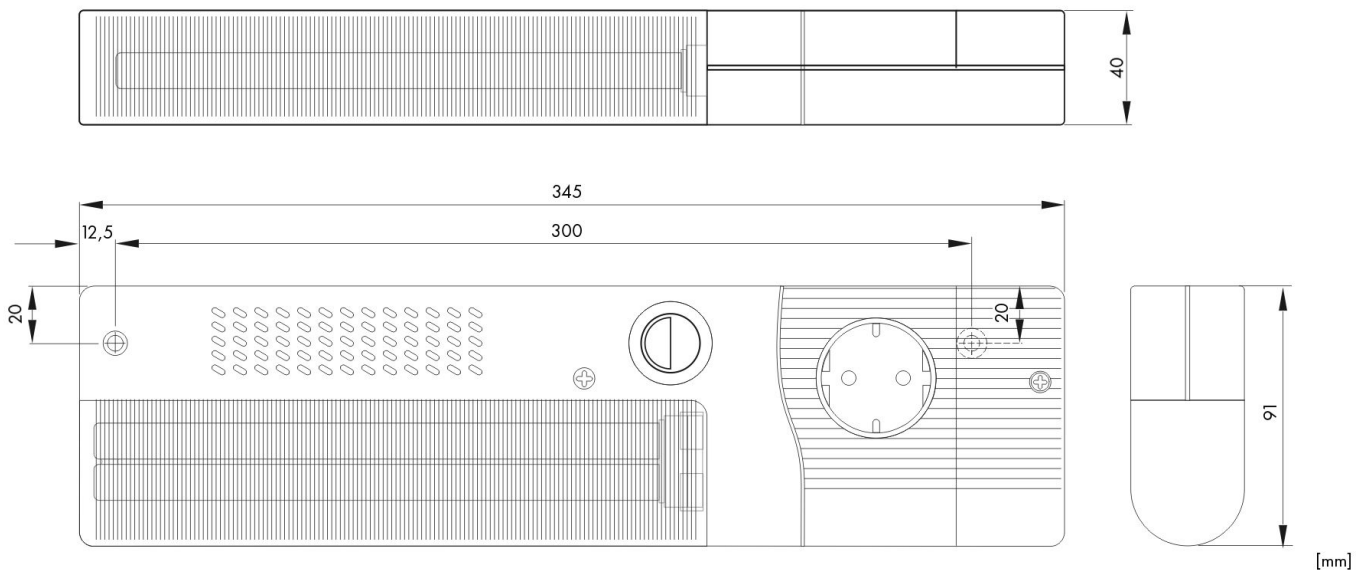

BEZEICHNUNG	BEST.NR.
Cabinet light IP20 with magnetic fastening and socket, 11W	IU008530
Energy saver bulb, bulb socket 2G7, luminous flux 900lm, 10.000h, terminal 2.5mm ² with cable clamp, with on/off switch	