

Data Sheet for Article: IU070127-A

Network Systemrack single-sectioned, W600xH1340xD600, 19", 27U



SCHRACK-Info

These 19"- systemracks are used when access to the equipment from all sides is necessary all the time.

Also frequently used for presentation of 19"- devices in show-rooms or on exhibitions.

The single section racks are designed for installations without heavy equipment.

The double section racks are designed for installation of heavier and larger equipment.

The in the double section racks included stabilization set increases stability of the whole rack in case of installation of slide-out devices, e.g. servers.

Installation:

- Direct on floor.
- By use of the included levelling feet in case of uneven floor.
- By use of optional castors with brake (Ordernumber: DSR00005-A).

MOUNTING OF THE FRAME

- To ensure the maximum recommended load, it is necessary to distribute the load equally. It is necessary to prevent one-side or one -point loading of the frame.
- Place the frame on a flat floor and compensate an eventual small roughness with nivelation feet.

CERTIFICATE AND CONFORMITY

- This product is fully in accordance with EN 62208 ed 2:2012.


Technical Data

Net width (mm)	600,00
Net height (mm)	1.340,00
Netto depth (mm)	600,00
Net weight (kg)	19,00
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40
Suitable for HU	27U-1365mm


Datei Tabelle: Network Systemrack single-sectioned, W600xH1340xD600, 19", 27U

	A[mm]	B[mm]	D[mm]	E[mm]	Maximum Load[kg]	Weight Brutto[kg]	Weight Netto[kg]
IU070127-A	1340	-	600	600	150	24,2	19
IU070141-A	2005	-	600	600	150	27,7	22,4
IU070227-A	1340	664	700	700	150	36,9	31,4
IU070242-A	2005	664	700	700	150	43,8	38,3

**Dimensioned drawing: Network Systemrack single-sectioned,
W600xH1340xD600, 19", 27U**

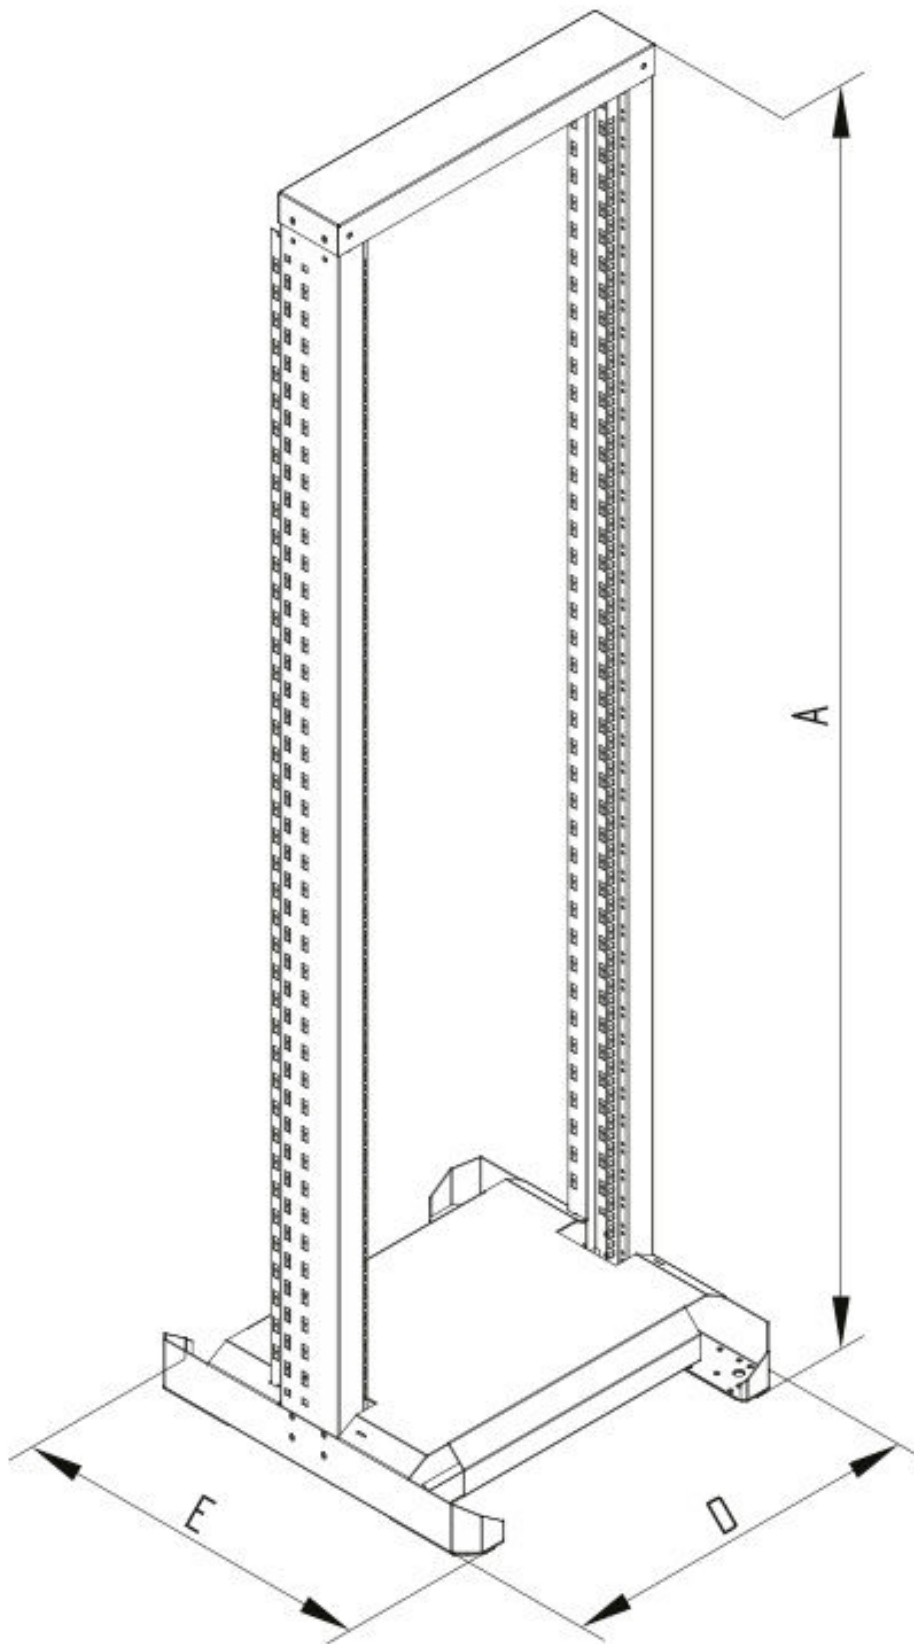

**Dimensioned drawing: Network Systemrack single-sectioned,
W600xH1340xD600, 19", 27U**

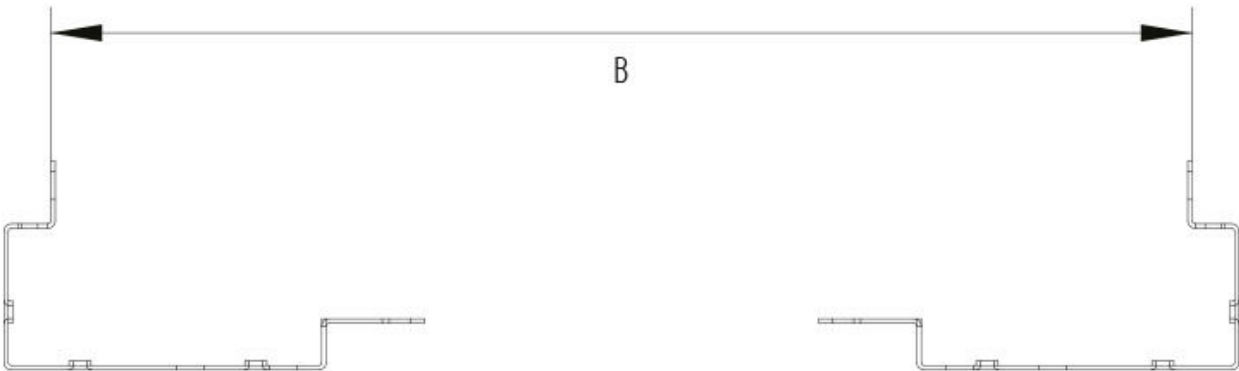

Article Table

DESCRIPTION	Order No.
Network Systemrack single-sectioned, W600xH1340xD600, 19", 27U	IU070127-A
Optional Accessories	
19" Cable management panel, 5 metal rings 80x40mm, 1 U, RAL7035	DBC14805
19" Cable management panel, 5 big rings 40x83mm, 1 U, RAL7035	DBK14805
19" Shelf Fix, up to 80kg Load, D=450mm, 1 U, RAL7035	DFS14845-C
19" PDU, 9xSchuko, Profile ALU 1 U, 2m-cable, RAL7035	IU070114
19" PDU, 7xSchuko with overvoltage protection, PVC, 1.25U	IU070113
2m-connector cable, RAL7035	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU ALU Profil	Q7070114-A
19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U 2m-cable, Black, ALU	Q7070113-A
19" Mounting set M6, 50 pcs. each: screw, nut, washer	DSSRA050
19" mounting plate, 14U, sheet steel, perforated including screws and cage nuts	DMP1914
Light unit LED, magnet, 230VAC, with door switch sensor automatically in operation as soon as the door is opened, external PSU	DTLIGHT01
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457