

Datenblatt für Artikel: IUKTS6201-

Cooling unit 1000W, outer mounting on the side, Series DTS

230V, IP54, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS6201:

- Cooling performance: 1000W
- Rated voltage: 230V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP54: Towards the enclosure
- Degree of protection IP34: Towards the surroundings




Technische Daten

Net width (mm)	410,00
Net height (mm)	968,00
Netto depth (mm)	253,00
Net weight (kg)	40,00
Min. ambient temperature (°C)	15
Max. ambient temperature (°C)	55
IP Rating	IP54
Protection class	I
Rated voltage	230V-AC
Product category	Cooling Unit
Cooling Performance (W)	1000


Technical Data for Cooling Unit 1000W, DTS Series, IUKTS6201

Data		Unit	IUKTS6201
Rated voltage +10%		Hz	AC 50 / 60
		V	230
Cooling capacity according to EN 14511	A35/A35:	W	1000
	A35/A50:		590
Power consumption	A35/A35:	W	445 / 560
Current consumption	A35/A35:	A	2.4 / 2.9
Starting current	A35/A35:	A	9.1
Energy efficiency ratio	ε _{ke}		2.2
Unimpeded airflow (free flow)	internal	m³/h	885
	external	m³/h	885
Fuse protection T		A	6
Type of connection			Spring-type terminal included with plug
Ambient temperature		°C (°F)	From +15 to +55 (from +59 to +131)
Control range (adjustable)		°C (°F)	From +25 to +45 (from +77 to +113); Factory setting +35 (+95)
Refrigerant	R134a	g	500
Condensate management			Integrated condensate evaporation system with safety overflow
Degree of protection according to EN 60529	IP54		Towards the enclosure if used as intended by the manufacturer
	IP34		Towards the surroundings if used as intended by the manufacturer
Design	Housing		Galvanised sheet steel
	Cover		Electrostatically powder coated (200 °C)
Dimensions		[mm]	H=968, W=410, D=253
Net weight		[kg]	40

Cooling Capacity Performance Curves

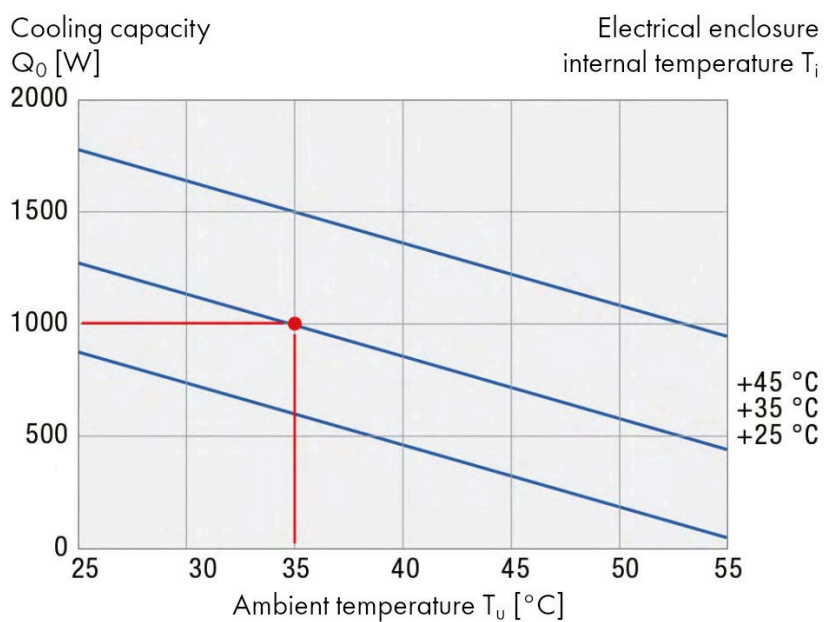

Dimensions and Cutout IUKTS6201

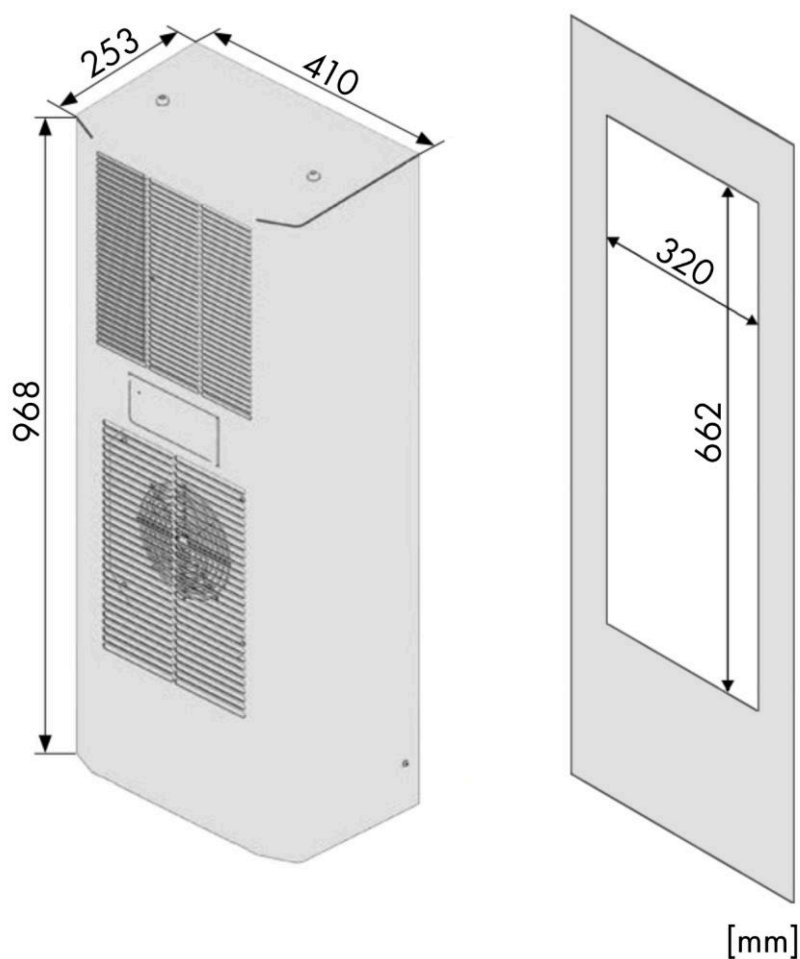

BEZEICHNUNG	BEST.NR.
Cooling unit 1000W, outer mounting on the side, Series DTS 230V, IP54, RAL 7035	IUKTS6201