

Data Sheet for Article: IUKTS6301A

Cooling unit 1500W, outer mounting on the side, Series DTS

400V, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings


Technical Data

Net width (mm)	399,00
----------------	--------


Technical Data - continued

Net height (mm)	966,00
Netto depth (mm)	244,00
Net weight (kg)	45,00
Min. ambient temperature (°C)	15
Max. ambient temperature (°C)	55
IP Rating	IP55
Protection class	I
Rated voltage	400V-AC
Product category	Cooling Unit
Cooling Performance (W)	1500

Kennlinien Kühlleistung

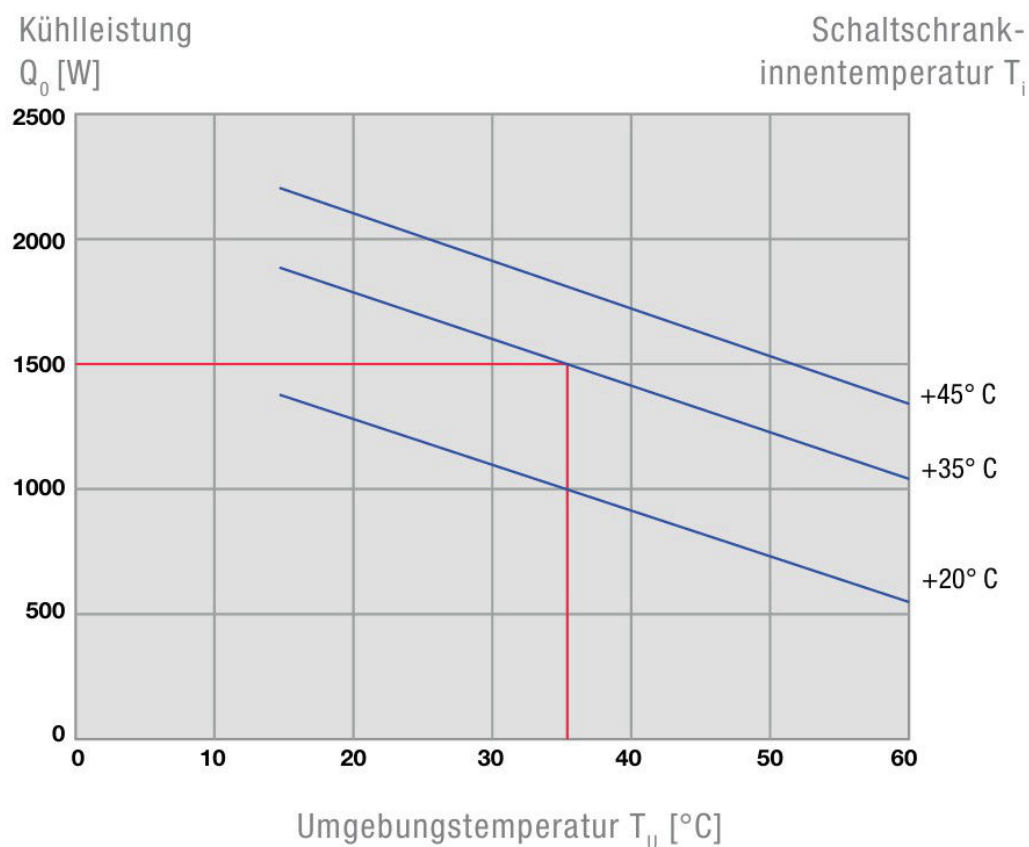

Dimensions and Cutout IUKTI6201 A

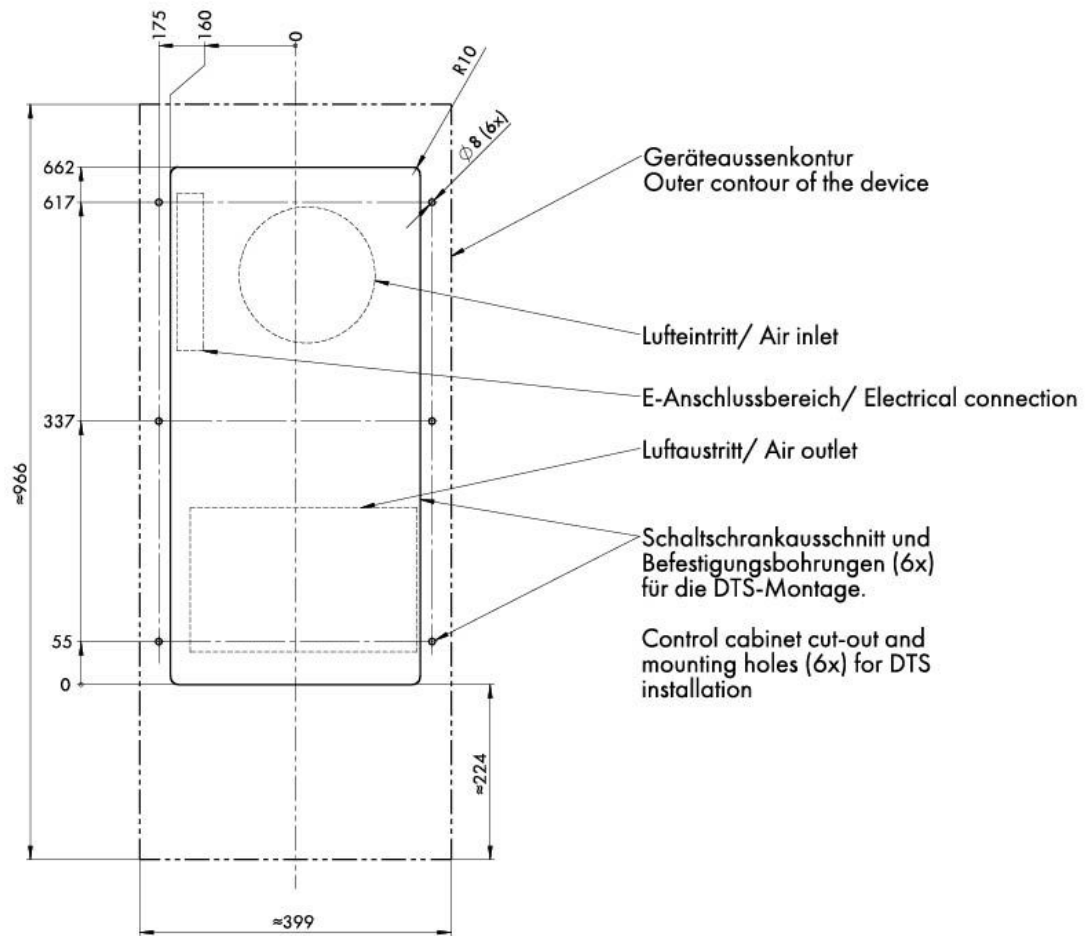

DESCRIPTION	Order No.
Cooling unit 1500W, outer mounting on the side, Series DTS 400V, IP55, RAL 7035	IUKTS6301A