


Data Sheet for Article: LI1008404-

GRIP! S 1~ 2000-3000K 11W PHASE 29°

gold / black

Cylindrical spotlight, dim-to-warm

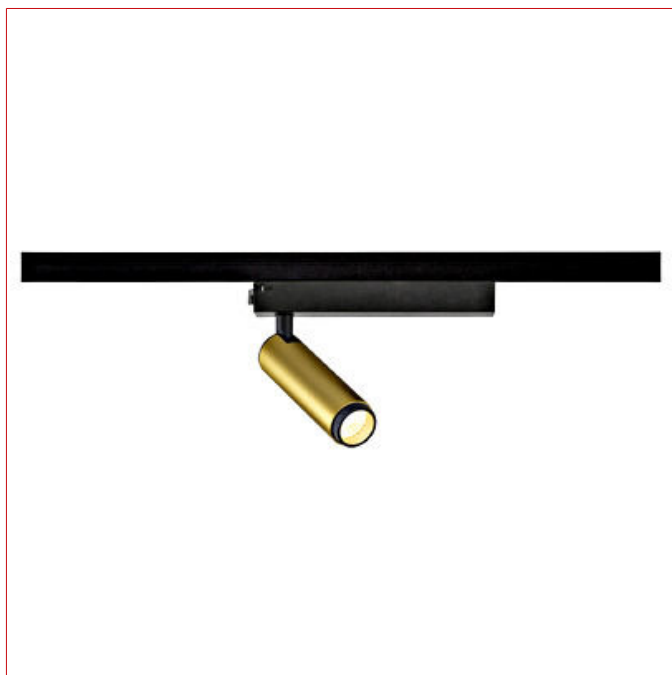

Technical Data

Net length (mm)	152,00
Net width (mm)	34,00
Net height (mm)	60,00
Net weight (kg)	0,18
Luminaire type	power trail luminaire
Mounting	power rail
Colour	Gold Black
Material	Aluminum
Beam angle (°)	29
Glare factor (UGR)	25
Operating voltage AC (V)	220-240
Operation current mA (mA)	250
Lamp holder	LED Platine
Power (W)	11
Light colour	ultra warm white warm white

Technical Data - continued

Colour temperature (K)	2000-3000
Colour rendering index (Ra)	≥90
Luminous flux (lm)	350
Service life	50000
Dimmable	leading edge dimmable (L) trailing edge dimmable (C)
Protection class	II
IP Rating	IP20
LxWxH mm	152x34x60

DESCRIPTION	Order No.
GRIP! S 1~ 2000-3000K 11W PHASE 29° gold / black Cylindrical spotlight, dim-to-warm	LI1008404