

Data Sheet for Article: LIC50018--

Ligne-S II Light Insert 40/50/60/70W 840

60° DALI white

Efficiency 195lm/W, dip switch driver, factory setting 60W, with 800mm flexible clamp




Technical Data

Net length (mm)	1.500,00
Net width (mm)	70,00
Net height (mm)	40,00
Net weight (kg)	1,75
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40
Mounting	Mounting rail installation

Technical Data - continued

Colour	White
Beam angle (°)	60
Input voltage AC (V)	220-240
System efficiency (lm/W)	195
Power (W)	70
	60
	50
	40
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	80
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	9750
	13650
	7800
	11700
Service life	50000
Protection class	I
IP Rating	IP20
LxWxH mm	1500x70x40

Dimensioned drawing: Ligne-S II Light Insert 40/50/60/70W 840 60° DALI white

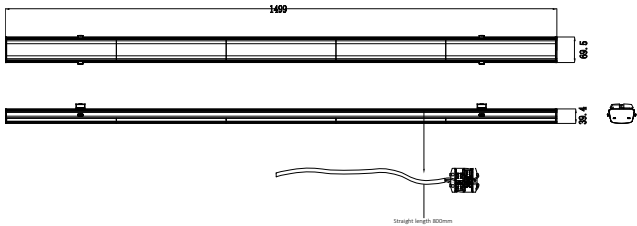

DESCRIPTION	Order No.
Ligne-S II Light Insert 40/50/60/70W 840 60° DALI white	LICS0018
Efficiency 195lm/W, dip switch driver, factory setting 60W, with 800mm flexible clamp	