


Data Sheet for Article: LID10132--

10105/MC BRUSHED CHROME 50W **ECONOMY**

01 REC SPOTS FIX



Product Details

Recessed MR16 spot with GU5.3 lampholder. _x000D_ _x000D_ Complies with standard EN60598-1 and any other specific standards.




Technical Data

Dimmable	yes Depending on light source
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Light source	Low voltage halogen - reflector lamp LED Retrofit
Illuminant incl.	no
Number of lamps	1
Lamp holder	GU5,3
Power (W)	50
Controller	Needs to be ordered separately

Technical Data - continued

Operating voltage AC (V)	12
Operating voltage DC (V)	12
Input voltage AC (V)	12
Input voltage DC (V)	12
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 70
Mounting Depth mm (mm)	60
Colour	Chrome
Material	Die-cast aluminum
Height (mm)	32
Diameter (mm)	81
Necessary Accessories	LID 13520--; LI44020746
ØxH mm	79x25
Cut-out size mm	Ø 70

Dimensioned drawing: 10105/MC BRUSHED CHROME 50W

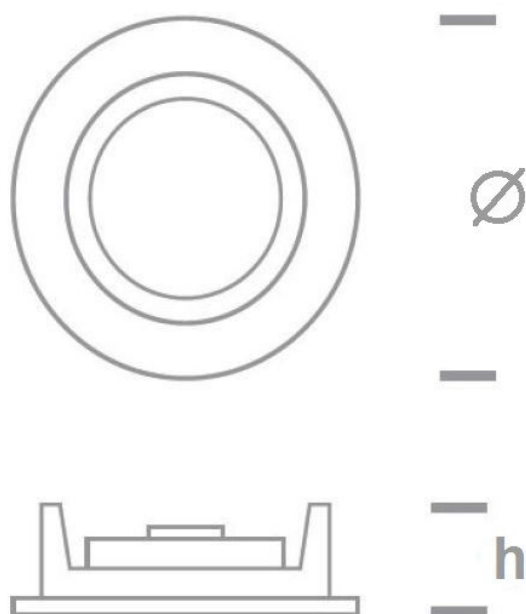

Article Table

DESCRIPTION	Order No.
10105/MC BRUSHED CHROME 50W 01 REC SPOTS FIX	LID10132
Necessary Accessories	
89075W DRIVER 12V 0-75W 230V 23 DRIVERS	LID13520
RL-MR16 35 3,8W 830 345lm 12V GU5.3 36° LED low voltage reflector lamp	LI44020746