



Datenblatt für Artikel: LID13443--

11112/AL/W ALUMINIUM COB 12W WW

700mA ADJUSTABLE

04 REC SPOTS ADJ LED

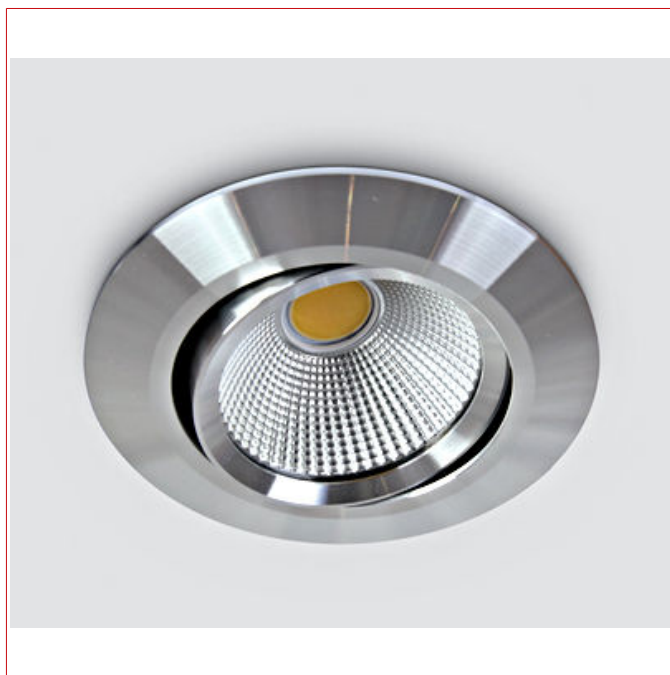

Produktinfo

12W COB LED Recessed Adjustable Spot. Requires 700mA driver. Complies with standard EN60598-1 and any other specific standards

Technische Daten

Luminous flux (lm)	1100
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes
Number of lamps	1
Lamp holder	LED Platine
Beam angle (°)	38

Technische Daten - Fortsetzung

System efficiency (lm/W)	91
Power (W)	12
Controller	Needs to be ordered separately
Operation current mA (mA)	700
Input current (A)	0,70
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 78
Mounting depth (mm)	90
Colour	Aluminium
Material	Aluminum
Height (mm)	85
Diameter (mm)	85
Optional Accessories	LID13081 --
Necessary Accessories	LID13081 --;
ØxH mm	85x85
Cut-out size mm	Ø 78

Artikeltabelle

BEZEICHNUNG	BEST.NR.
11112/AL/W ALUMINIUM COB 12W WW 700mA ADJUSTABLE 04 REC SPOTS ADJ LED	LID13443
Necessary Accessories	
89015A DRIVER 700mA 7-15W 230V 23 DRIVERS	LID13081
Optional Accessories	
89015A DRIVER 700mA 7-15W 230V 23 DRIVERS	LID13081