



Datenblatt für Artikel: LID14032--


# 50148AU/W/W WHITE LED 48w WW 62x62

## UGR19 PANEL IP20 1200mA €ECONOMY

LED recessed mounted panel, requires 1200mA driver; 06 DOWNLIGHT FIX LED



### Light distribution curve



### Produktinfo

UGR19 62x62 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications. Requires 1200mA LED driver. Complies with standard EN60598-1 and any other specific standards.




### Technische Daten

|                    |        |
|--------------------|--------|
| Luminous flux (lm) | 4000lm |
|--------------------|--------|

## Technische Daten - Fortsetzung

|                             |                                       |
|-----------------------------|---------------------------------------|
| Light colour                | warm white                            |
| Colour temperature (K)      | 3000                                  |
| Colour rendering index (Ra) | ≥80                                   |
| Dimmable                    | Depending on driver<br>yes            |
| Protection class            | III                                   |
| IP Rating                   | IP20                                  |
| Luminaire type              | LED Panel                             |
| Illuminant incl.            | yes                                   |
| Number of lamps             | 1                                     |
| Lamp holder                 | LED Platine                           |
| Beam angle (°)              | 120                                   |
| Power (W)                   | 48                                    |
| Controller                  | Needs to be ordered separately        |
| Operation current mA (mA)   | 1200                                  |
| Mounting                    | recessed mounting ceiling<br>pendant  |
| Mounting depth (mm)         | 55                                    |
| Colour                      | White                                 |
| Material                    | Aluminum                              |
| Length (mm)                 | 620                                   |
| Width (mm)                  | 620                                   |
| Height (mm)                 | 10                                    |
| Optional Accessories        | LID 13401--; LID 15379--; LID 16949-- |
| Necessary Accessories       | LID 13319--; LID 13754--; LID 16598-- |
| LxWxH mm                    | 620x620x10                            |
| Watt (W)                    | 48                                    |

**Dimensioned drawing: 50148AU/W/W WHITE LED 48w WW 62x62 UGR19  
PANEL IP20 1200mA**

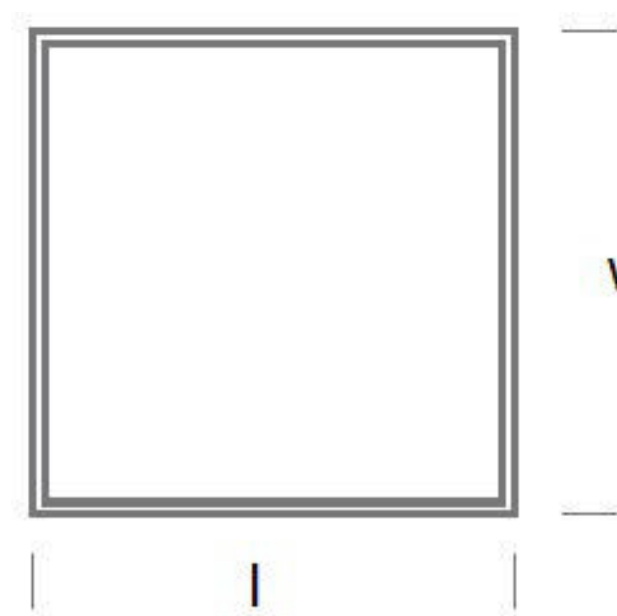

## Artikeltabelle

| BEZEICHNUNG                                                                                                                            | BEST.NR. |
|----------------------------------------------------------------------------------------------------------------------------------------|----------|
| 50148AU/W/W WHITE LED 48w WW 62x62 UGR19 PANEL IP20 1200mA<br>LED recessed mounted panel, requires 1200mA driver; 06 DOWNLIGHT FIX LED | LID14032 |
| <b>Necessary Accessories</b>                                                                                                           |          |
| LED Treiber, 650-1400mA, 50W<br>25 LAMPS                                                                                               | LID13319 |
| 89048T TRIAC DIMMABLE DRIVER FOR 1200mA 48w PANELS<br>23 DRIVERS                                                                       | LID13754 |
| 89050TLD DALI/PUSH TO DIM/ 1-10V /TRIAC UNIVERSAL DRIVER 50W<br>IP20 230V; 23 DRIVERS                                                  | LID16598 |
| <b>Optional Accessories</b>                                                                                                            |          |
| 050017 SUSPENSION KIT FOR LED PANELS<br>2 piece for Lano 1200 x 600; 06 DOWNLIGHT FIX LED                                              | LID13401 |
| 3-way connection box, IP20, Quick Fix<br>26 ACCES&GADGETS                                                                              | LID15379 |
| 050180E FAST CABLE CONNECTOR 32A 2x3-port<br>26 ACCES&GADGETS                                                                          | LID16949 |