


Data Sheet for Article: LID15017--

11107K/B/W BLACK 6,5W WW 700mA

ADJUSTABLE DARK LIGHT

quick fix Ring must be ordered separately requires 700mA driver; 04 REC SPOTS ADJ LED

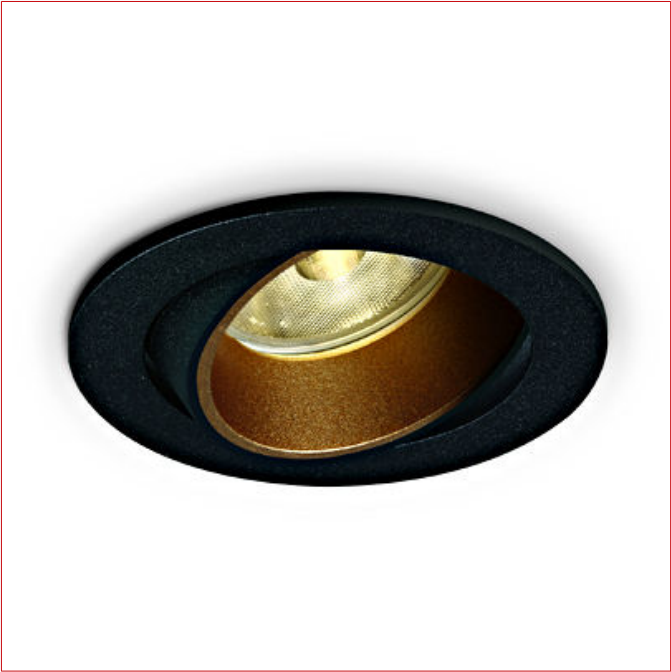

Product Details

6,5W COB LED adjustable recessed spot with interchangeable rings. Ring must be ordered separately. Requires 700mA driver. Complies with standard EN60598-1 and any other specific standards.


Technical Data

Luminous flux (lm)	550
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	35
System efficiency (lm/W)	84

Technical Data - continued

Power (W)	6,50
Controller	Needs to be ordered separately
Operation current mA (mA)	700
Input current (A)	0,70
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 76
Mounting Depth mm (mm)	100
Colour	Black
Material	Aluminum
Diameter (mm)	85
Optional Accessories	LID 16949--
Necessary Accessories	LID 15019--; LID 15022--; ; LID 15020--; LID 15018--; LID 15637--;LID 17390--
ØxH mm	85x73
Cut-out size mm	Ø 76

Dimensioned drawing: 11107K/B/W BLACK 6,5W WW 700mA ADJUSTABLE DARK LIGHT

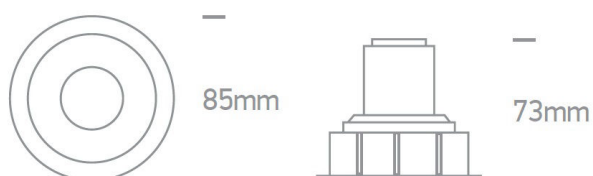

Article Table

DESCRIPTION	Order No.
11107K/B/W BLACK 6,5W WW 700mA ADJUSTABLE DARK LIGHT quick fix Ring must be ordered separately requires 700mA driver; 04 REC SPOTS ADJ LED	LID15017
Necessary Accessories	
050102/B BLACK RING FOR 11107K 04 REC SPOTS ADJ LED	LID15019
050102/BS BRASS RING FOR 11107K 04 REC SPOTS ADJ LED	LID15022
050102/CU COPPER RING FOR 11107K 04 REC SPOTS ADJ LED	LID15020
050102/W WHITE RING FOR 11107K 04 REC SPOTS ADJ LED	LID15018
89008A DRIVER 700mA 4-8W 230V 23 DRIVERS	LID15637
89008AT DIMMABLE DRIVER 700mA 6-8W 230V 23 DRIVERS	LID17390
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949