

Data Sheet for Article: LID15426--

67454/AN/W ANTHRACITE LED 6W WW IP65

100-240V

Wall and ceiling luminaire, Complete with driver; 13 WALL & CEIL LED



Product Details

6W LED for window frame illumination,IP65. Complete with non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Technical Data

Luminous flux (lm)	330
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Dimmable	no
Protection class	I
IP Rating	IP65
Shock strength	IK08
Luminaire type	ceiling luminaire wall luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	270

Technical Data - continued

System efficiency (lm/W)	55
Power Factor	0,5
Power (W)	6
Controller	LED driver
Operating voltage AC (V)	100-240
Input voltage AC (V)	100-240
Operation current mA (mA)	550
Input current (A)	0,50
Frequency (Hz)	50/60
Mounting	surface mounting ceiling surface mounting wall
Colour	Anthracite
Material	Die-cast aluminum
Length (mm)	140
Width (mm)	95
Height (mm)	62
Optional Accessories	LID16949--
LxWxH mm	140x95x62

Dimensioned drawing: 67454/AN/W ANTHRACITE LED 6W WW IP65 100-240V

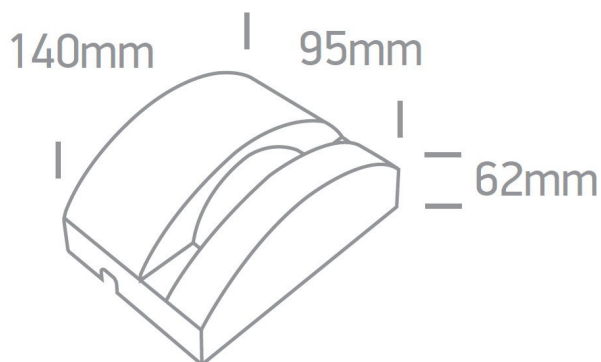

Article Table

DESCRIPTION	Order No.
67454/AN/W ANTHRACITE LED 6W WW IP65 100-240V Wall and ceiling luminaire, Complete with driver; 13 WALL & CEIL LED	LID15426
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949