

Datenblatt für Artikel: LID15433--

11112RA/W/W WHITE COB LED 12w WW 36° IP20 350mA ADJUSTABLE

Recessed Spot, adjustable, Requires 350mA driver, adjustable, quick fix; DARK LIGHT; 04 REC SPOTS ADJ LED



Produktinfo

12W COB LED recessed adjustable spot, white with black reflector for general lighting applications. Requires 350mA constant current LED driver. Complies with standard EN60598-1 and any other specific standards.


Technische Daten

Luminous flux (lm)	1020
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	36

Technische Daten - Fortsetzung

System efficiency (lm/W)	85
Power (W)	12
Controller	Needs to be ordered separately
Operation current mA (mA)	350
Input current (A)	0,35
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 55
Mounting depth (mm)	50
Colour	White
Material	Aluminum
Height (mm)	155
Diameter (mm)	40
Optional Accessories	LID16949--
Necessary Accessories	LID12540--;
ØxH mm	65x155
Cut-out size mm	Ø 55

Dimensioned drawing: 1112RA/W/W WHITE COB LED 12w WW 36° IP20 350mA ADJUSTABLE

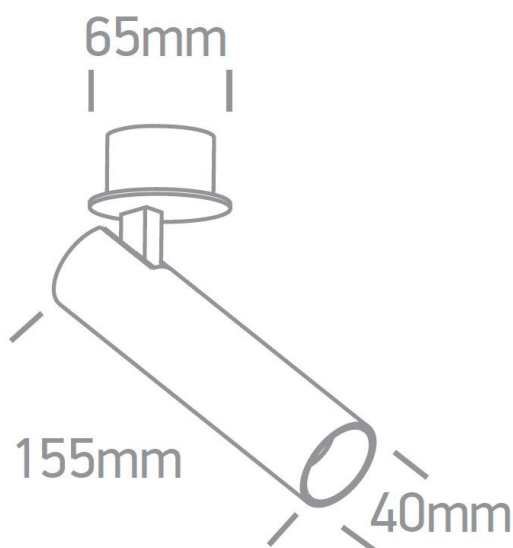

Artikeltabelle

BEZEICHNUNG	BEST.NR.
11112RA/W/W WHITE COB LED 12w WW 36° IP20 350mA ADJUSTABLE Recessed Spot, adjustable, Requires 350mA driver, adjustable, quick fix; DARK LIGHT; 04 REC SPOTS ADJ LED	LID15433
Necessary Accessories	
89015 DRIVER 350mA 7-15W 230V 23 DRIVERS	LID12540
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949