

Data Sheet for Article: LID16316--

69066D/C 12X1W LED CW SS316 IP68

RECESSED UNDERWATER 24V

20 GARDEN&UNDERWATER



Product Details

12W underwater LED spot, IP68. Underwater only / 2m max depth. Requires 24V driver. Complies with standard EN60598-1 and any other specific standards.


Technical Data

Luminous flux (lm)	850
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP68
Shock strength	IK10
Luminaire type	recessed floor luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
System efficiency (lm/W)	70

Technical Data - continued

Power (W)	12
Controller	Needs to be ordered separately
Operating voltage DC (V)	24
Input voltage DC (V)	24
Mounting	in-ground mounted
Cut-out size (mm)	Ø 175
Mounting Depth mm (mm)	130
Colour	Stainless steel
Material	Stainless steel 316
Height (mm)	122
Diameter (mm)	190
Optional Accessories	LID 16949--
ØxH mm	190x122
Cut-out size mm	Ø 175

Dimensioned drawing: 69066D/C 12X1W LED CW SS316 IP68 RECESSED UNDERWATER 24V

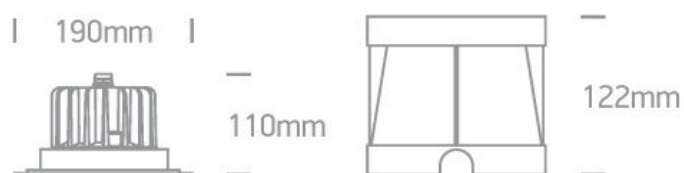

Article Table

DESCRIPTION	Order No.
69066D/C 12X1W LED CW SS316 IP68 RECESSED UNDERWATER 24V 20 GARDEN&UNDERWATER	LID16316
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949