


Data Sheet for Article: LID17400--

7829A/EW LED STRIP 24V DC EW 5m ROLL

9,6W/m IP20

LED Flexstrip, dimmable, 5 meter Roll; 08 STRIPS & PROFILES

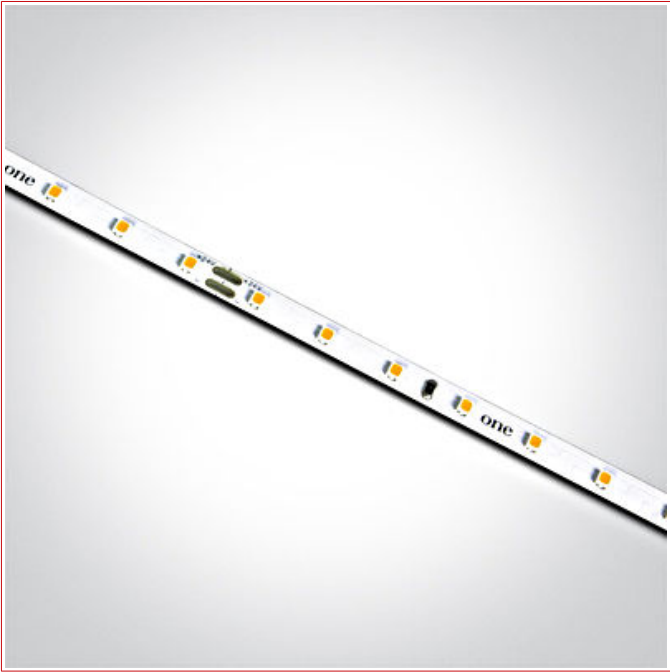

Product Details

Flexible LED strip with SMD2835 LEDs, 70LEDs/m, 9,6W/m. Supplied in 5 meters roll with 3M double face adhesive tape. Can be cut every 10cm (7-LED segment). Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.

Technical Data

Net length (mm)	5.000,00
Net width (mm)	8,00
Luminaire type	LED Strip
Mounting	surface mounting ceiling surface mounting wall floor mounting
Controller	Needs to be ordered separately
Operating voltage DC (V)	24
Input voltage DC (V)	24
Lamp holder	LED Platine
System efficiency (lm/W)	80
Light colour	warm white

Technical Data - continued

Colour temperature (K)	2700
Colour rendering index (Ra)	≥90
luminous flux/m (lm/m)	768
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Energy efficiency class	F
Illuminant incl.	yes

Dimensioned drawing: 7829A/EW LED STRIP 24V DC EW 5m ROLL 9,6W/m IP20

Cut every 10cm
(7-LED segment)



DESCRIPTION	Order No.
7829A/EW LED STRIP 24V DC EW 5m ROLL 9,6W/m IP20	LID17400
LED Flexstrip, dimmable, 5 meter Roll; 08 STRIPS & PROFILES	