

Data Sheet for Article: LID17934--

7028CF/B/V BLACK 200W CCTV IP65 AC 230V

21 INDUSTRIAL & FLDS



Product Details

200W DOB LED CCT Variable floodlight with adjustable mounting bracket. IP65 rated for outdoor use. Complies with standard EN60598-1 and any other specific standards.


Technical Data

Net length (mm)	380,00
Net width (mm)	315,00
Net height (mm)	32,00
Colour	Black
Material	Aluminum Glass
Cover	Glas opal
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Input voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	100


Technical Data - continued

Power (W)	200
Light colour	neutral white warm white cool white
Colour temperature (K)	4000 6500 3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	20000
Service life	36.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65
Shock strength	IK06
LxWxH mm	380x315x32

Dimensioned drawing: 7028CF/B/V BLACK 200W CCTV IP65 AC 230V

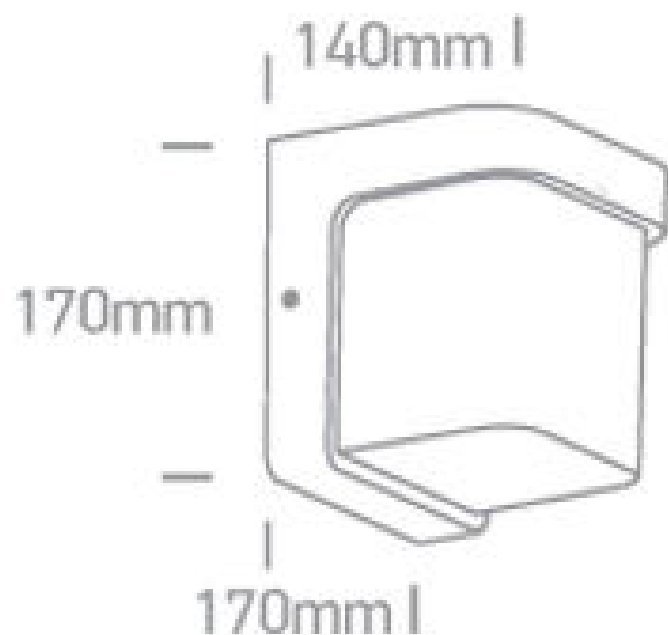

Dimensioned drawing: 7028CF/B/V BLACK 200W CCTV IP65 AC 230V

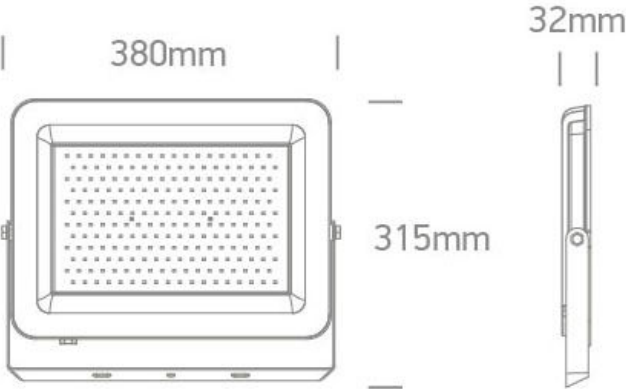

DESCRIPTION	Order No.
7028CF/B/V BLACK 200W CCTV IP65 AC 230V	LID17934
21 INDUSTRIAL & FLDS	