

Data Sheet for Article: LIEP00010-

Line 50 PL DI/IND 68W 7703lm 940 UGR<19 DALI, white, L-1452

Pendant luminaire made of aluminium direct / indirect; high output, UGR <19




Technical Data

Lumen	7703
Luminous flux (lm)	7719
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Glare factor (UGR)	<19
Service life	50.000h (L80/B50)
Dimmable	no
Protection class	I
IP Rating	IP20
Luminaire type	pendulum luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
System efficiency (lm/W)	7719
Power (W)	64,30
Operating voltage AC (V)	220-240V
Input voltage AC (V)	220-240V
Colour	White

Technical Data - continued

Material	Aluminum
Length (mm)	1411
Width (mm)	50
Height (mm)	80,50
Weight (kg)	4,20
LxWxH mm	1452x50x81
Numbers of luminars per MCB B13	20
Numbers of luminars per MCB B16	25
Numbers of luminars per MCB C13	25
Numbers of luminars per MCB C16	32

Dimensioned drawing: Line 50 PL DI/IND 68W 7703lm 940 UGR<19 DALI, white, L-1452

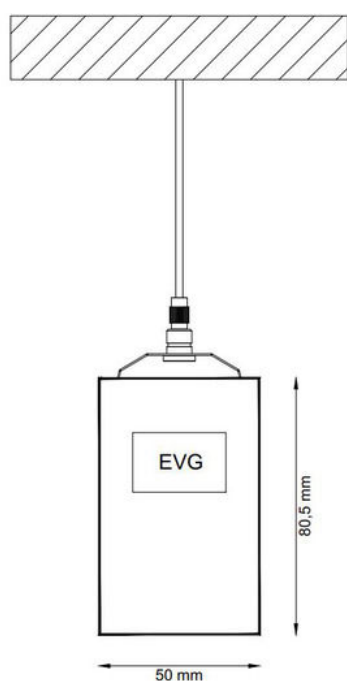

DESCRIPTION	Order No.
Line 50 PL DI/IND 68W 7703lm 940 UGR<19 DALI, white, L-1452	LIEP00010
Pendant luminaire made of aluminium direct / indirect; high output, UGR <19	