



Data Sheet for Article: LIEP0482--

NOVIA LINE 50 D/I 34,5W 4615lm 840 MP UGR<19 DALI BL L-1454

Aluminum profile luminaire with microprismatic PMMA diffuser, direct/indirect distribution, incl. cable suspension 2000mm, IP20

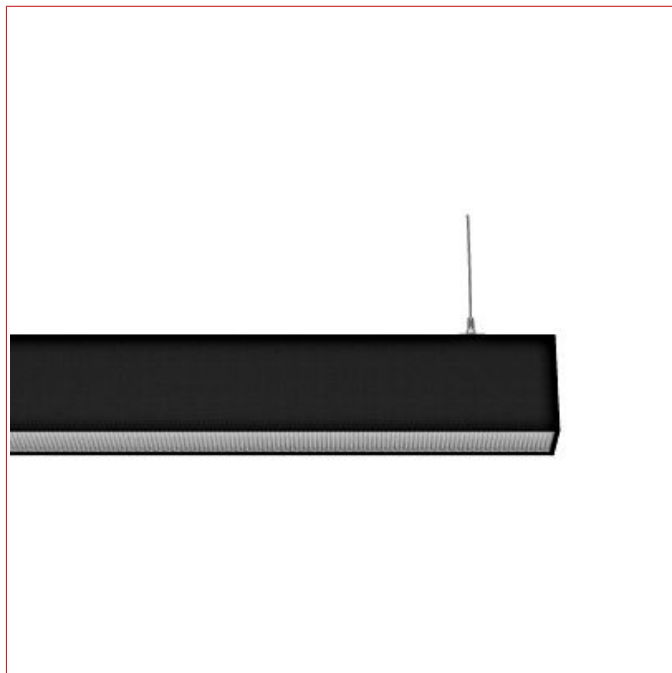

Light distribution curve




Technical Data

Net length (mm)	1.454,00
Net width (mm)	50,00
Net height (mm)	81,00
Net weight (kg)	4,40
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Service life	50.0000h (L70/B50)

Technical Data - continued

LxWxH mm | 1454x50x81

Dimensioned drawing: NOVIA LINE 50 D/I 34,5W 4615lm 840 MP UGR<19 DALI BL L-1454



DESCRIPTION	Order No.
NOVIA LINE 50 D/I 34,5W 4615lm 840 MP UGR<19 DALI BL L-1454	LIEP0482
Aluminum profile luminaire with microprismatic PMMA diffuser, direct/indirect distribution, incl. cable suspension 2000mm, IP20	