


Datenblatt für Artikel: LIFS008005

FS 72, RGB, 100% MIX, 17,5W/m, 420lm/m, 24VDC, IP44, l=5m

Power rating at 100% Mix RGBW max. 18.0W/m




Technische Daten

Power per Meter (W/m)	15, 10
luminous flux/m (lm/m)	420
Light colour	RGB
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP44
Luminaire type	LED Strip
Illuminant incl.	yes
Beam angle (°)	120
Operating voltage DC (V)	24
Mounting	surface mounting ceiling surface mounting wall
Lenght (mm)	5000
Width (mm)	10,50
Height (mm)	3

Technische Daten - Fortsetzung

Optional Accessories	LIAP006001;LIAP006003;LIAP006002;LIAP006004;LIAP006005;LIAP001003;LIAP001008;LIAP001001;LIAP001005;LIAP001002;LIAP001006;LIAP001004;LIAP001007;LIAP005003;LIAP005001;LIAP003002;LIAP003004;LIAP003003;LIAP003001;LIAP003005;LIAP003100;LIAP003200;LIAP004001;LIAP002006;LIAP002001;LIAP002003;LIAP002002;LIAP002004;LIAP002005
Necessary Accessories	LILPV10024;LI28004432;LINT924100;LINT245100
LxWxH mm	5000x11x3

Dimensioned drawing: FS 72, RGB, 100% MIX, 17,5W/m, 420lm/m, 24VDC, IP44, l=5m

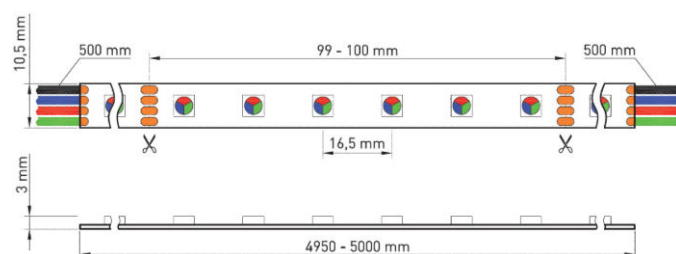

Artikeltabelle

BEZEICHNUNG	BEST.NR.
FS 72, RGB, 100% MIX, 17,5W/m, 420lm/m, 24VDC, IP44, l=5m Power rating at 100% Mix RGBW max. 18.0W/m	LIFS008005
Necessary Accessories	
LED Power Supplies LPV 100W/24V, IP67	LILPV10024
LC 100W 24V one4all NF SC EXC2 (DALI2 DT 6, DSI, switchDIM) Dimmable 24 V constant-voltage LED driver for flexible constant-voltage LED strips	LI28004432
LED Power Supplies FW 100W/24V, MM, IP20	LINT924100
LED SN power supply 100W/24V IP20 long	LINT245100
Optional Accessories	
Aluminium profile CLF L-2000mm W-35mm H-15mm	LIAP006001
Aluminium profile CLI L-2000mm W-45mm H-35mm	LIAP006003
Aluminium profile CLR L-2000mm W-35mm H-35mm	LIAP006002
Aluminium profile CLU L-2000mm W-45mm H-17mm	LIAP006004
Aluminium profile CLW L-2000mm W-35mm H-90mm	LIAP006005
Aluminium profile LBE, L-2000mm W-25mm H-25mm	LIAP001003

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optional Accessories	
Aluminium profile LBE L-2000mm W-19,3mm H-21,6mm	LIAP001008
Aluminium Profile LBF, L-2000mm W-19mm H-8mm	LIAP001001
Aluminium profile LBI, L-2000mm W-29mm H-19mm	LIAP001005
Aluminium profile LBR, L-2000mm W-19mm H-19mm	LIAP001002
Aluminium profile LBS, L=2000mm, Ø-29,9mm	LIAP001006
Aluminium profile LBU, L-2000mm W-29mm H-8mm	LIAP001004
Aluminium profile LBV, L-2000mm W-22mm H-65mm	LIAP001007
Aluminium profile MFI L-2000mm W-55mm H-57mm	LIAP005003
Aluminium profile MFR L-2000mm W-45mm H-60mm	LIAP005001
Aluminium profile SLA, L-2000mm W-60mm H-36mm	LIAP003002
Aluminium profile SLH L-2000mm W-60mm H-80mm	LIAP003004
Aluminium profile SLI, L-2000mm W-60mm H-36mm	LIAP003003
Aluminium profile SLR, L-2000mm W-60mm H-50mm	LIAP003001
Aluminium profile SLT L-2000mm W-60mm H-70mm	LIAP003005
Aluminium profile SLW smooth L-2000mm W-58,6mm H-20,5mm	LIAP003100
Aluminium profile SLW rippled L-2000mm W-58,6mm H-20,5mm	LIAP003200
Aluminium profile SPL L-2000mm W-35,2mm H-25mm	LIAP004001
Aluminium profile TBE L-2000mm W-40mm H-14,5mm	LIAP002006
Aluminium profile TBF L-2000mm W-25mm H-12,5mm	LIAP002001
Aluminium profile TBI, L-2000mm W-25mm H-27mm	LIAP002003
Aluminium profile TBR, L-2000mm W-25mm H-25mm	LIAP002002
Aluminium profile TBU, L-2000mm W-25mm H-14,5mm	LIAP002004
Aluminium profile TBW, L-2000mm W-26,3mm H-80mm	LIAP002005