


Data Sheet for Article: LIG100045B

PRIMOLUX LED 1235 50W 7150lm/840 3h M opal ECG IP44 white



Light distribution curve




Technical Data

Net length (mm)	1.235,00
Net width (mm)	95,00
Net height (mm)	72,00
Net weight (kg)	3,20
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	30

Technical Data - continued

Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	White
Material	PMMA opal sheetsteel
Cover	opal
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	125
Power (W)	50
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	7150
Emergency light	Emergency kit 3h
Luminous flux in emergency mode (lm)	370
Service life	60.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP44
Shock strength	IK05
Illuminant incl.	yes
Numbers of luminars per MCB B10	35
Numbers of luminars per MCB B16	56

Dimensioned drawing: PRIMOLUX LED 1235 50W 7150lm/840 3h M opal ECG IP44 white

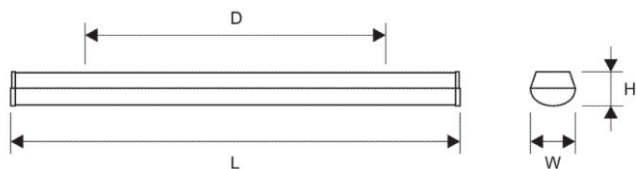

DESCRIPTION	Order No.
PRIMOLUX LED 1235 50W 7150lm/840 3h M opal ECG IP44 white	LIG100045B