



Data Sheet for Article: LIG5L01121


FORCA LED Mini 25W 3350lm 4000K IP65

50° symmetric, grey

Floodlight



Light distribution curve




Technical Data

Net length (mm)	272,00
Net width (mm)	238,00
Net height (mm)	73,00
Net weight (kg)	3,50
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	55
Colour	Grey
Material	Hardened glass Die-cast aluminum
Beam angle (°)	50
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	128
Power (W)	25
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	3350
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP65
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	272x238x73
Numbers of luminars per MCB B10	12,60
Numbers of luminars per MCB B16	20

Dimensioned drawing: FORCA LED Mini 25W 3350lm 4000K IP65 50° symmetric, grey

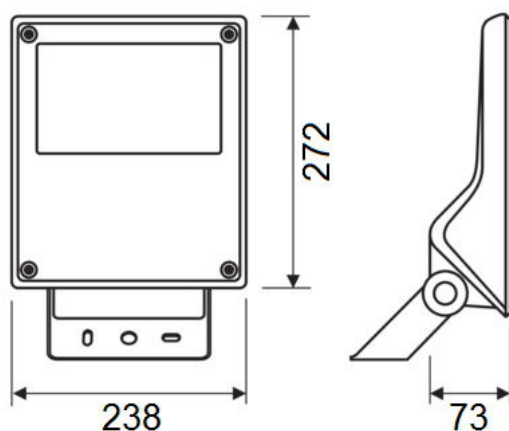

DESCRIPTION	Order No.
FORCA LED Mini 25W 3350lm 4000K IP65 50° symmetric, grey Floodlight	LIG5L01121