



Data Sheet for Article: LIG5L01141


FORCA LED Mini 25W 3100lm 4000K IP65

asymmetric, grey

Floodlight, as wide



Light distribution curve




Technical Data

Net length (mm)	272,00
Net width (mm)	238,00
Net height (mm)	73,00
Net weight (kg)	3,50
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	55
Colour	Grey
Material	Hardened glass Die-cast aluminum
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	124
Power (W)	25
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	3100
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP65
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	272x238x73
Numbers of luminars per MCB B10	12,60
Numbers of luminars per MCB B16	20

Dimensioned drawing: FORCA LED Mini 25W 3100lm 4000K IP65 asymmetric, grey

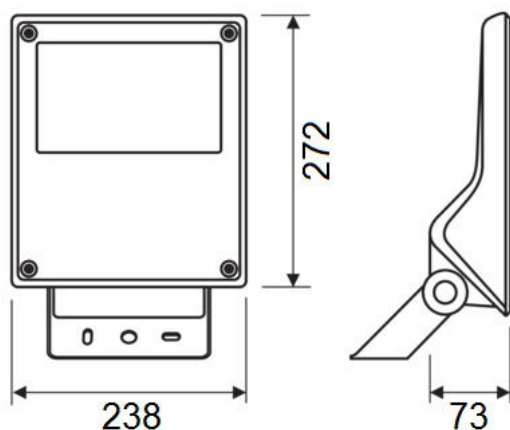

DESCRIPTION	Order No.
FORCA LED Mini 25W 3100lm 4000K IP65 asymmetric, grey Floodlight, as wide	LIG5L01141