


Data Sheet for Article: LIG5L06221

AVENIDA Pole LED 20,5W 1580lm 740 IP66 IK09 1000mm graphite

Bollar luminaire, rotationally symmetric



Light distribution curve




Technical Data

Net height (mm)	1.000,00
Net diameter (mm)	150,00
Net weight (kg)	9,70
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	50

Technical Data - continued

Mounting	floor mounting
Colour	Grafit
Material	Die-cast aluminum
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Power (W)	20,50
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	1580
Service life	96.000h / L80 / B10
Dimmable	no
Protection class	II
IP Rating	IP66
Illuminant incl.	yes
Diameter (mm)	150
ØxH mm	150x1000
Numbers of luminars per MCB B16	50

**Dimensioned drawing: AVENIDA Pole LED 20,5W 1580lm 740 IP66 IK09
1000mm graphite**

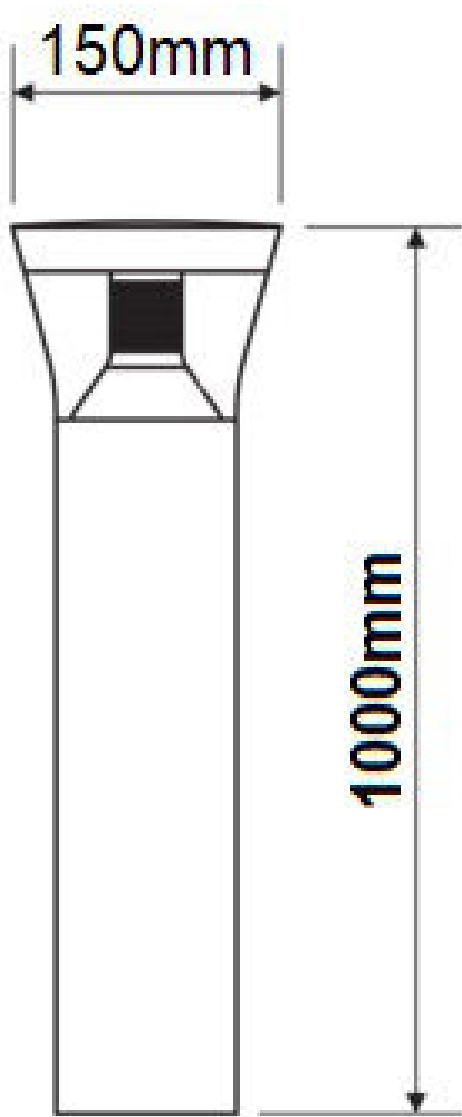

DESCRIPTION	Order No.
AVENIDA Pole LED 20,5W 1580lm 740 IP66 IK09 1000mm graphite Bollar luminaire, rotationally symmetric	LIG5L06221