


Data Sheet for Article: LIGL042051

TRAFFIK R LED 69W 8950lm/740 IP66 O32

grey
Streetlight



Light distribution curve




Technical Data

Net length (mm)	615,00
Net width (mm)	230,00
Net height (mm)	80,00
Net weight (kg)	4,10
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	50
Surge protection (kV)	10
Colour	Grey
Controller	ECG
Lamp holder	LED Platine
System efficiency (lm/W)	131
Power (W)	69
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	9050
Service life	100.000h
Dimmable	no
IP Rating	IP66
Illuminant incl.	yes
Pole-top (mm)	48 60
LxWxH mm	615x230x80
Numbers of luminars per MCB B10	8
Numbers of luminars per MCB B16	12
Numbers of luminars per MCB B25	20

Dimensioned drawing: TRAFFIK R LED 69W 8950lm/740 IP66 O32 grey

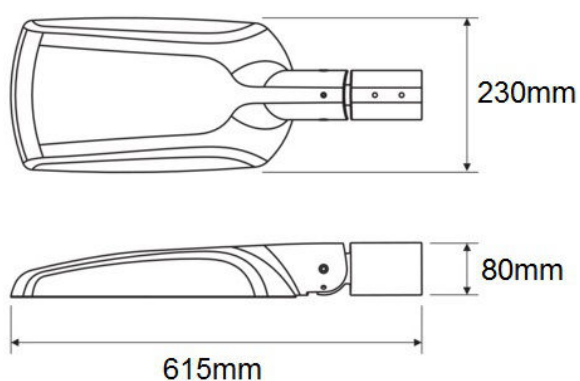

DESCRIPTION	Order No.
TRAFFIK R LED 69W 8950lm/740 IP66 O32 grey Streetlight	LIGL042051