

Data Sheet for Article: LIGL072031


AVENIDA LED 34W 4500lm 730 IP66

symmetric graphite

Pole-top luminaire, the mast is not part of the luminaire



Light distribution curve




Technical Data

Net height (mm)	482,00
Net diameter (mm)	360,00
Net weight (kg)	4,40
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	55

Technical Data - continued

Luminaire type	street light
Mounting	mast mounting
Colour	Grafit
Material	Polycarbonate Die-cast aluminum
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	114
Power (W)	35
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	4000
Service life	100.000h / L90 / B10
Dimmable	no
Protection class	II
IP Rating	IP66
Shock strength	IK08
Illuminant incl.	yes
Diameter (mm)	360
ØxH mm	360x482
Numbers of luminars per MCB B10	15
Numbers of luminars per MCB B16	21

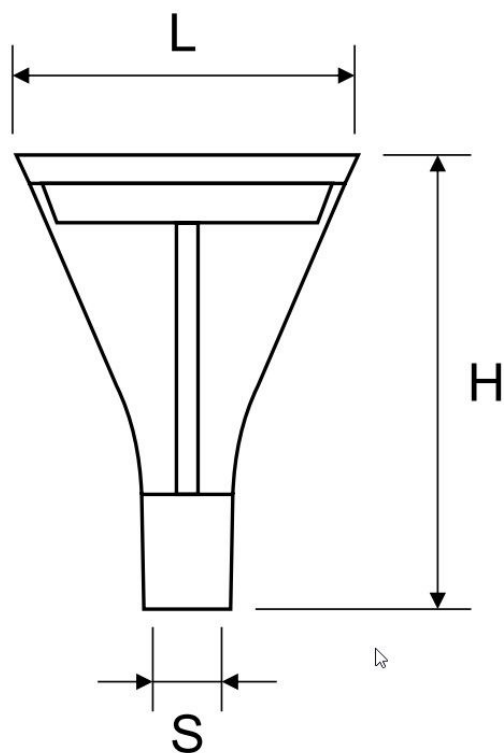Dimensioned drawing: AVENIDA LED 34W 4500lm 730 IP66 symmetric graphite

Article Table

DESCRIPTION	Order No.
AVENIDA LED 34W 4500lm 730 IP66 symmetric graphite Pole-top luminaire, the mast is not part of the luminaire	LIGL072031
Optional Accessories	
Cover masking for pole ø60 mm for AVENIDA LED, grey	LIG7200966