

Data Sheet for Article: LIGL102061


RUBINO LED 102W 13350lm/740 IP66 O7

grey

Street lamp with asymmetrical light distribution



Light distribution curve




Technical Data

Net length (mm)	550,00
Net width (mm)	250,00
Net height (mm)	100,00
Net weight (kg)	6,80
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	50
Surge protection (kV)	6
Colour	Grey
Controller	ECG
Lamp holder	LED Platine
System efficiency (lm/W)	131
Power (W)	102
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	13350
Service life	100.000h / L80 / B10
Dimmable	no
IP Rating	IP66
Illuminant incl.	yes
Pole-top (mm)	60
LxWxH mm	550x250x100

Dimensioned drawing: RUBINO LED 102W 13350lm/740 IP66 O7 grey

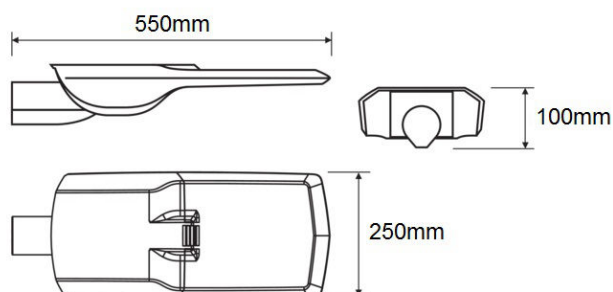

Article Table

DESCRIPTION	Order No.
RUBINO LED 102W 13350lm/740 IP66 O7 grey Street lamp with asymmetrical light distribution	LIGL102061
Optional Accessories	
RUBINO LED bracket ø76mm gray -15° bis +15° (every 5° adjustable)	LIG7001309
RUBINO LED wall bracket 60 mm, grey	LIG1517818
RUBINO LED site cover, set of 2 pieces RUBINO LED site cover, set of 2 pieces	LIG7201097
RUBINO LED rear cover RUBINO LED rear cover	LIG7201096