

Data Sheet for Article: LIGL462061


RUBINO LED 102W 12850lm/ 730 IP66 O7

grey

Street lamp with asymmetrical light distribution



Light distribution curve




Technical Data

Net length (mm)	550,00
Net width (mm)	250,00
Net height (mm)	100,00
Net weight (kg)	6,80
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	50
Luminaire type	street light
Mounting	mast mounting
Colour	Grey
Material	Polycarbonate Die-cast aluminum
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	126
Power (W)	102
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	12850
Service life	100.000h / L90 / B10
Dimmable	no
Protection class	II
IP Rating	IP66
Shock strength	IK09
Illuminant incl.	yes
LxWxH mm	550x250x100

Dimensioned drawing: RUBINO LED 102W 12850lm/730 IP66 O7 grey

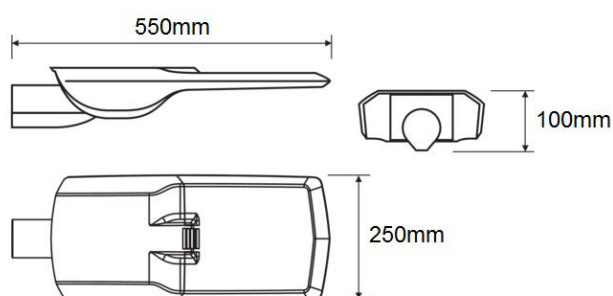

Article Table

DESCRIPTION	Order No.
RUBINO LED 102W 12850lm/730 IP66 O7 grey Street lamp with asymmetrical light distribution	LIGL462061
Optional Accessories	
RUBINO LED bracket ø76mm gray -15° bis +15° (every 5° adjustable)	LIG7001309
RUBINO LED wall bracket 60 mm, grey	LIG1517818
RUBINO LED site cover, set of 2 pieces RUBINO LED site cover, set of 2 pieces	LIG7201097
RUBINO LED rear cover RUBINO LED rear cover	LIG7201096