

Data Sheet for Article: LIHGWA12--


ILAS LED PIR 12,5W 750lm 3000K IP54

anthracite

LED Wall luminaires with PIR Sensor for outdoor



Light distribution curve






Technical Data

Net length (mm)	205,00
Net width (mm)	166,00
Net height (mm)	101,00
Net weight (kg)	1,20
Luminaire type	wall luminaire
Colour	RAL 7016 (anthracite)
Material	Aluminum PC
Beam angle (°)	110
Operating voltage AC (V)	220-240
Temperature range - Operation (°C)	-20 to +40
Lamp holder	LED Platine
Power of system (W)	>0,8
System efficiency (lm/W)	60
Power (W)	12,50
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	750
Service life	25.000h
Dimmable	no
Protection class	I
IP Rating	IP54
Energy efficiency class	E
Shock strength	IK08
Illuminant incl.	yes
Detection beam (m)	2.0-7.0
Detection angle (°)	100
LxWxH mm	205x166x101
Numbers of luminars per MCB B10	17
Numbers of luminars per MCB B13	22
Numbers of luminars per MCB B16	28
Numbers of luminars per MCB C10	26
Numbers of luminars per MCB C16	41

LIHGWA12

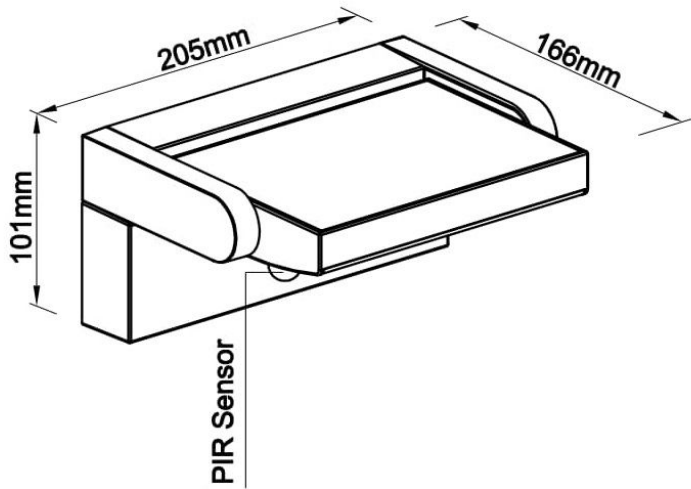

DESCRIPTION	Order No.
ILAS LED PIR 12,5W 750lm 3000K IP54 anthracite LED Wall luminaires with PIR Sensor for outdoor	LIHGWA12