

Data Sheet for Article: LILE0122--

Novia R 900 52/70/88W 3000/4000K Ra90 UGR19 DALI2 black

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light colour, 3000K/4000K, 52W=6300lm / 70W=8600lm / 88W=10700lm@4000K, 122lm/W@4000K, Ø-900mm H=64/79mm, black



Product Details

The Novia R 900 is a stylish, round luminaire designed for wall and ceiling mounting that provides both direct and indirect lighting, with the indirect component able to be switched off as needed. Ideal for offices and workspaces, it features a CRI >90 (guaranteeing excellent color rendering) and a UGR <19 (minimizing glare). It is available in 38W (5000lm) and 50W (7000lm) with color temperatures of 3000K and 4000K. The DALI-dimmable driver and flexible installation options provide added convenience. A pendant mount is available as an option.




Technical Data

Net height (mm)	79,00
Net diameter (mm)	900,00
Net weight (kg)	8,00
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40


Technical Data - continued

Temperature range - Operation (°C)	-10 to +40
Colour	Black RAL 9005
Material	Aluminum PMMA
Glare factor (UGR)	<19
Operating voltage AC (V)	220 - 240V
Operating voltage DC (V)	186V / 216V / 240V / 260V
Lamp holder	LED Platine
System efficiency (lm/W)	127
Power (W)	88 70 52
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	90
Luminous flux (lm)	6300/8600/10700
Service life	50.000h/ L80/ B10
Dimmable	DALI-2 DT6 Push to DIM
IP Rating	IP20
Energy efficiency class	D
Shock strength	06
Illuminant incl.	yes
Diameter (mm)	900
ØxH mm	900x79

**Dimensioned drawing: Nova R 900 52/70/88W 3000/4000K Ra90 UGR19
DALI2 black**

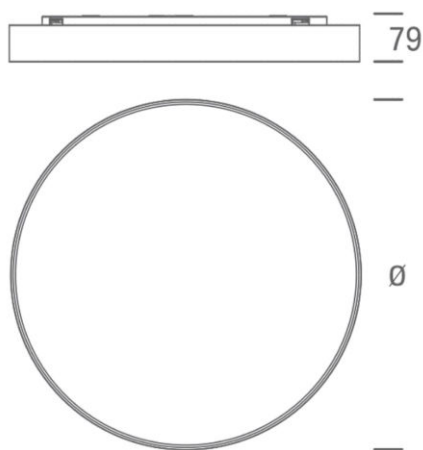

**Dimensioned drawing: Nova R 900 52/70/88W 3000/4000K Ra90 UGR19
DALI2 black**

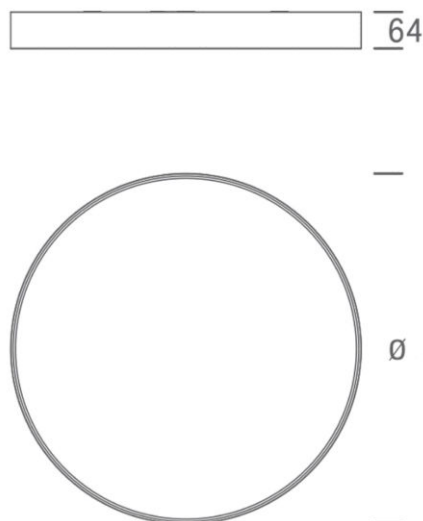

Article Table

DESCRIPTION	Order No.
Novia R 900 52/70/88W 3000/4000K Ra90 UGR19 DALI2 black	
Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light colour, 3000K/4000K, LILE0122	
52W=6300lm / 70W=8600m / 88W=10700lm@4000K, 122lm/W@4000K, Ø-900mm H=64/79mm, black	
Optional Accessories	
Wire suspension for Novia R 600/900 round, black, L=1,5m	LILE0120
Driver for Novia R 900 RA90	LILE0127
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers	EHDALIDIM
For push button control	