

Data Sheet for Article: LILE0128--

Elegance Shine 24/ 18/ 10W 3000K/ 4000K Ra80 IP65 opal, white

Wall, ceiling light with adjustable wattage and light colour, Lumen 24W = 3000lm / 18W = 2300lm / 10W = 1300lm




Technical Data

Net height (mm)	90,00
Net diameter (mm)	300,00
Net weight (kg)	2,80
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	Surface-mounted luminaire
Mounting	surface wall mounting luminaire surface mounted ceiling luminaire
Colour	White
Material	Acryl Acrylic
Cover	opal
Beam angle (°)	120
Operating voltage AC (V)	220-240

Technical Data - continued

Operation current mA (mA)	100
	50
	75
System efficiency (lm/W)	125
	128
	130
Power (W)	24
	18
	10
Light colour	neutral white
	warm white
Colour temperature (K)	4000
	3000
Colour rendering index (Ra)	80
Luminous flux (lm)	1300
	2300
	3000
Dimmable	yes with optional, dimmable driver
Protection class	I
IP Rating	IP65
Shock strength	IK10
Diameter (mm)	300
ØxH mm	300x90

**Dimensioned drawing: Elegance Shine 24/ 18/ 10W 3000K/ 4000K Ra80 IP65
opal, white**

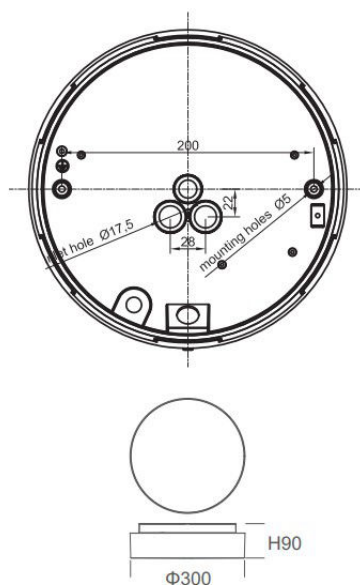

Article Table

DESCRIPTION	Order No.
Elegance Shine 24/18/10W 3000K/4000K Ra80 IP65 opal, white	LILE0128
Wall, ceiling light with adjustable wattage and light colour, Lumen 24W = 3000lm / 18W = 2300lm / 10W = 1300lm	
Optional Accessories	
	DALI-M