

Datenblatt für Artikel: LIMT0025--

MARRA PRO II 14,4W/m 2425lm/m 4000K CRI>90 24VDC IP20 15m

Sale: Excluded from warranty.




Technische Daten

Net length (mm)	15.000,00
Net width (mm)	10,00
Net height (mm)	2,00
Net weight (kg)	0,26
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	LED Strip
Mounting	surface mounting ceiling surface mounting wall floor mounting
Beam angle (°)	120
Operating voltage DC (V)	24
System efficiency (lm/W)	168
Light colour	neutral white


Technische Daten - Fortsetzung

Colour temperature (K)	4000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	3
luminous flux/m (lm/m)	2425
Service life	60.000h / L90 / B10
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Illuminant incl.	yes
LxWxH mm	15000x10x2

Dimensioned drawing: MARRA PRO II 14,4W/m 2425lm/m 4000K CRI>90 24VDC IP20 15m



Energieeffizienzklasse: **MARRA PRO II 14,4W/m 2425lm/m 4000K CRI>90 24VDC IP20 15m**

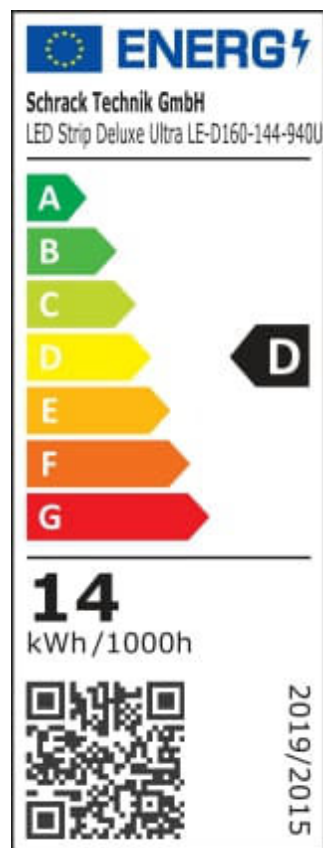

Artikeltabelle

BEZEICHNUNG	BEST.NR.
MARRA PRO II 14,4W/m 2425lm/m 4000K CRI>90 24VDC IP20 15m	LIMT0025
Sale: Excluded from warranty.	
Optional Accessories	
Connector 2-pin 10mm (10 pieces)	
Marra PRO II	LIMT0036
Connector 2-pin 10mm with 15cm wire (10 pieces)	
Marra PRO II	LIMT0040
LED Power Supplies LPV 100W/24V, IP67	LILPV10024
LED Power Supplies LPV 60W/24V, IP67	LILPV6024
LED Power Supplies LPV 36W/24V, IP67	LILPV3524
Aluminium Profile LBF, L-2000mm W-19mm H-8mm	LIAP001001
Aluminium profile LBR, L-2000mm W-19mm H-19mm	LIAP001002
Aluminium profile TBI, L-2000mm W-25mm H-27mm	LIAP002003
Aluminium profile TBR, L-2000mm W-25mm H-25mm	LIAP002002
Profile end cap LBF flat closed	LIEK001100
Profile end cap LBF flat with slotted hole	LIEK001101

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optional Accessories	
PMMA cover LB flat transparent L-2000mm W-18mm H-6mm	LIAB001001
PMMA cover LB flat opal L-2000mm W-18mm H-6,4mm	LIAB001003
PMMA cover TB flat opal L-2000mm W-24mm H-6mm	LIAB002003
End cap LBR flat closed	LIEK001200
End cap LBR flat with slotted hole	LIEK001201
Profile end cap TBR flat closed	LIEK002200
Profile cap TBR flat with slotted hole	LIEK002201
Profile cap TBI flat closed	LIEK002300
	LIEK002325