


Datenblatt für Artikel: LIPK0002--

MAIA LED Round 330 30W/24W 3K/4K IP54 230V white

Wall, ceiling light with adjustable power and light colour, lumen 30W = 3000lm / 24W = 2400lm



Light distribution curve

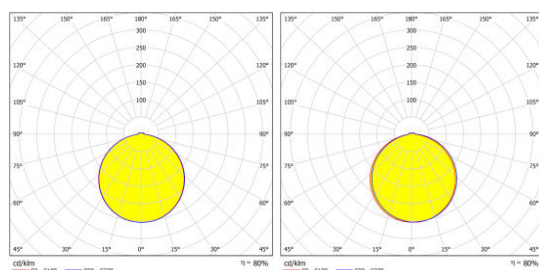

Produktinfo

The MAIA LED Round 330 is a practical, cost-effective luminaire, ideal for stairwells and corridors. It provides reliable lighting with adjustable wattage (24W, 30W) and color temperature (3000K/4000K). The simple, functional design ensures broad, even light distribution.




Technische Daten

Net height (mm)	48,00
Net diameter (mm)	330,00
Net weight (kg)	1,10
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	30
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PC
Beam angle (°)	120
Operating voltage AC (V)	220 - 240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	24;30
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<6
Luminous flux (lm)	2400 3000
Service life	30.000h (L70/B50)
Dimmable	no
Protection class	II
IP Rating	IP54

Technische Daten - Fortsetzung

Energy efficiency class	F
Shock strength	IK06
Illuminant incl.	yes
Diameter (mm)	330
ØxH mm	330x48
Numbers of luminars per MCB B10	12
Numbers of luminars per MCB B13	14
Numbers of luminars per MCB B16	18
Numbers of luminars per MCB B20	24
Numbers of luminars per MCB B25	30
Numbers of luminars per MCB C10	18
Numbers of luminars per MCB C13	24
Numbers of luminars per MCB C16	29
Numbers of luminars per MCB C20	36
Numbers of luminars per MCB C25	45

Dimensioned drawing: MAIA LED Round 330 30W/24W 3K/4K IP54 230V white

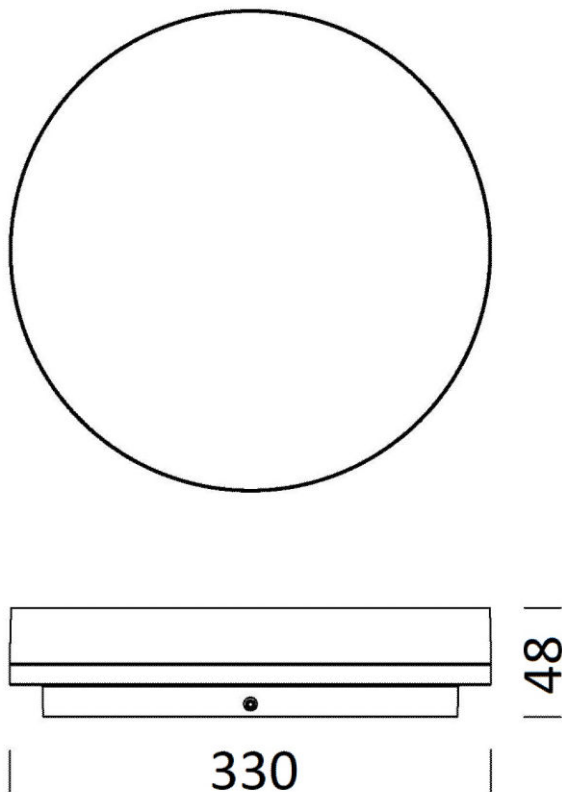

BEZEICHNUNG	BEST.NR.
MAIA LED Round 330 30W/24W 3K/4K IP54 230V white	LIPK0002
Wall, ceiling light with adjustable power and light colour, lumen 30W = 3000lm / 24W = 2400lm	